

# SL POWER TF3000 SERIES

3000 Watts Single Output  
Industrial Grade



Advanced Energy's SL Power TF3000 series of industrial grade AC-DC fan-cooled power supply comprises seven output models. All models feature industrial safety approvals and accept a universal input of 90 to 264 VAC. These compact switch-mode power supplies feature output overvoltage, overtemperature, overload protection, with short-circuit protection on all output models. TF3000 series power supplies provide up to 3000 Watts of output power with remote setting multiple PSU and global control function.

## AT A GLANCE

### Total Power

Up to 3000 Watts

### Input Voltage

90 to 264 VAC

### # of Outputs

Single

## SPECIAL FEATURES

- Universal Input 90 to 264 VAC Input Range
- 3000 W Fan-Cooled  
(Load & Temperature Controlled)
- Programmable Output Voltage  
(0% to 105%)
- Programmable Output Current  
(0% to 105%)
- Forced Current Sharing at Parallel Operation
- Constant Current Limit
- Selectable +5 V/0.5 A or +9 V/0.3 A Auxiliary Output
- Remote Setting Multiple PSU via I<sup>2</sup>C & RS232 & RS485
- Power OK Signal
- Remote ON/OFF, Remote Sense Function

- Protection: OVP, OLP, OTP, Fan Failure
- 3 Year Warranty
- RoHS Compliant
- Conformal Coating Applied

## SAFETY

- CSA/IEC/EN/UL62368-1



## ELECTRICAL SPECIFICATIONS

| Input                                    |  |
|--|--|
| Input Voltage and Frequency <sup>1</sup> | 90 to 264 VAC, 47 to 63 Hz, 1Ø<br>127 to 370 VDC   |
| Input Current                            | 19.7 A @ 115 VAC, 14.5 A @ 230 VAC   |
| Inrush Current                           | 33 A/115 VAC, 65 A/230 VAC   |
| Efficiency                               | See Model Selection Table  |
| Power Factor                             | 0.95/230 VAC, 0.98/115 VAC at full load  |
| Leakage Current                          | <3.5 mA/240 VAC  |
| Output                                   |  |
| Output Voltage                           | See Model Selection Table  |
| Output Power <sup>1</sup>                | 3000 W continuous (2400 W for 12 V, 15 V models) - see models chart for specific voltage model ratings |
| Voltage Range                            | ±5.0% typical adjustment by potentiometer (VR1)  |
| Voltage Tolerance                        | See Model Selection Table  |
| Hold-Up Time                             | 14 mS/230 VAC at full load   |
| Turn On Time                             | 800 mS   |
| Rise Time                                | 100 mS at full load  |
| Ripple and Noise                         | See Model Selection Table  |
| Line/Load Regulation                     | See Model Selection Table  |
| Auxiliary Signals                        |  |
| Auxiliary Power                          | Selectable +5 V/0.5 A or +9 V/0.3 A auxiliary output   |
| Remote On / Off Control                  | By external switch   |
| Power OK Signal                          | Open drain signal low when PSU turns on. Max sink current: 20 mA. Max drain voltage: 40 V              |
| Output Voltage Trim                      | Adjustment of output voltage is between 0 to 105% of rated output                                      |
| Output Current Trim                      | Adjustment of output voltage is between 0 to 105% of rated output                                      |
| Parallel (Current Sharing) <sup>2</sup>  | Please refer to current sharing with remote sensing (parallel connection) diagram                      |
| Reliability                              |  |
| MTBF                                     | >112,000 hours per MIL-HDBK-217F   |
| Protection                               |  |
| Overvoltage Protection                   | 120±7% of Vout, latch type (Recovery after reset AC power ON or inhibit) (Refer to VCI vs. OVP Curve)  |
| Short Circuit Protection                 | Constant current, auto-recovery  |
| Overload Protection                      | 105% of rated power, constant current type   |
| Overtemperature Protection               | 85±5°C measured on NTC, auto-recovery  |
| Safety                                   |  |
| Safety Certifications                    | Approved to EN/CSA/IEC/UL62368-1   |
| Isolation Specifications                 |  |
| Isolation <sup>3</sup>                   | Input-Output: 3000 VAC<br>Input-Ground: 1500 VAC<br>Output-Ground: 500 VAC                             |
| Isolation Resistance                     | I/P-O/P, I/P-FG, O/P-FG: 100 Mohms/500 VDC   |

## Notes:

1. Derating may apply in low input voltage. Please check the derating curve for details.

2. In parallel connection only one unit will operate if the total output load is less than 5% of the rated power.

3. This test is done without enclosure: I/P-O/P 4242 VDC. If with enclosure: I/P-O/P 2121 VDC, I/P-FG: 2121 VDC, O/P-FG: 707 VDC

## EMI/EMC COMPLIANCE

|  |   |
|--|---|
| Conducted Emissions  | Certified EN55022; EN61204-3; EN61000-6-3 |
| Radiated Emissions   | Certified EN55022; EN61204-3; EN61000-6-3 |
| Electro-Static Discharge (ESD)<br>Immunity On Power Ports      | EN55024/IEC61000-4-2                      |
| Radiated RF EM Fields Susceptibility                           | EN55022/EN61000-4-3                       |
| Electrical Fast Transients (EFT)/Burst                         | EN55024/IEC61000-4-4                      |
| Surges, Line to Line (Diff Mode)<br>and Line to Gnd (CMN Mode) | EN55024/IEC61000-4-5                      |
| Conducted Disturbances Induced by<br>RF Fields                 | EN55022/IEC61000-4-6                      |
| Rated Power Frequency Magnetic<br>Fields                       | EN55024/IEC1000-4-8                       |
| Voltage Interruptions, Dips, Sags &<br>Surges                  | EN55024/IEC/EN61000-4-11                  |
| Harmonic Current Emissions                                     | EN61000-3-2                               |
| Flicker Test   | EN61000-3-3                               |

## Note:

The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.


## ENVIRONMENTAL SPECIFICATIONS

|                                  |  |
|----------------------------------|--|
| Operating Temperature            | -25°C to +60°C (Refer to load de-rating curve)   |
| Temperature Derating             | See derating curve   |
| Vibration                        | 10 to 500 Hz, 2 G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes<br>Compliance to IEC68-2-6, IEC68-2-64 |
| Dimensions                       | 170 x 64 x 280 mm (6.7 x 2.5 x 11.02 in)   |
| Cooling                          | Load and temperature control fan   |
| Relative Humidity                | 20% to 90%, non-condensing   |
| Storage Temperature and Humidity | -40 to +85°C, 10 to 95% RH   |
| Weight & Packing                 | 2.6 kg 6 pcs/carton, 16.6 kg/1.86 CUFT   |

## CONNECTOR INFORMATION

|                           | Input Connector   | Output Connector | Signal Connector   |
|---------------------------|---|------------------|--|
| Pinout                    | Term. 1) AC LINE<br>Term. 2) NEUTRAL<br>Term. 3) GROUND | + and -          | See Signal Connector table on pg 4   |
| Mating Connector/Terminal | #10 wire lugs   | 1/4-20 wire lugs | Connector: JST PHDR-24VS or equivalent<br>Pins: JST SPHD-002T-P0.5 or equivalent |

## MECHANICAL DRAWING

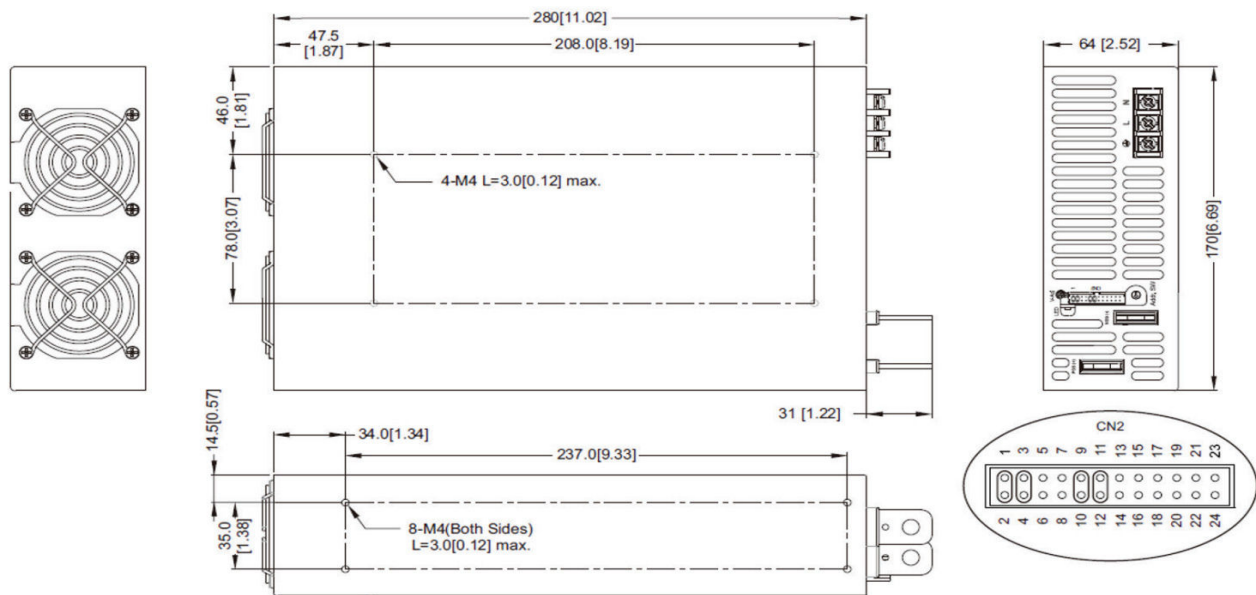

Recommended screw length is measured from the power supply surface.

## SIGNAL CONNECTOR

| Pin No. | Function | Description                              | Pin No. | Function        | Description   |
|---------|----------|--|---------|-----------------|---|
| 1       | VS+      | Remote sense (+)                         | 13      | ACI             | I Program   |
| 2       | VO+      | Positive output voltage                  | 14      | GND             | Ground  |
| 3       | VS-      | Remote sense (-)                         | 15      | VCI             | V Program   |
| 4       | VO-      | Negative output voltage                  | 16      | GND             | Ground  |
| 5       | POK      | Power OK                                 | 17      | AUX             | +5 V/0.5 A or +9 V/0.3 A auxiliary power            |
| 6       | GND      | Ground                                   | 18      | GND             | Ground  |
| 7       | PAR      | Parallel operation current share         | 19      | SCL             | Serial clock used in the I <sup>2</sup> C interface |
| 8       | VSET     | Aux output setting                       | 20      | SDA             | Serial data used in the I <sup>2</sup> C interface  |
| 9       | EN-      | Inhibit ON/OFF (-)                       | 21      | AUX             | +5 V/0.5 A or +9 V/0.3 A auxiliary power            |
| 10      | GND      | Ground                                   | 22      | GND             | Ground  |
| 11      | EN+      | Inhibit ON/OFF (+)                       | 23      | RX <sup>1</sup> | For UART (5V TTL) Receiver function                 |
| 12      | AUX      | +5 V/0.5 A or +9 V/0.3 A auxiliary power | 24      | TX <sup>1</sup> | For UART (5V TTL) Transmission function             |

Note 1: For RS232/485 communication, the additional UART to RS232/485 converter is required. Contact AE for the details.

## MODEL SELECTION

| Model Number <sup>1</sup> | Output Volts | Rated Current | Current Range | Output Power | Ripple & Noise <sup>2</sup> | Line Regulation | Load Regulation | Voltage Tolerance <sup>3</sup> | Efficiency |
|---------------------------|--------------|---------------|---------------|--------------|-----------------------------|-----------------|-----------------|--------------------------------|------------|
| TF3000A12K                | 12 V         | 200 A         | 0-200 A       | 2400 W       | 150 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 88%        |
| TF3000A15K                | 15 V         | 160 A         | 0-160 A       | 2400 W       | 150 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 89%        |
| TF3000A24K                | 24 V         | 125 A         | 0-125 A       | 3000 W       | 240 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 91%        |
| TF3000A36K                | 36 V         | 83.3 A        | 0-83.3 A      | 3000 W       | 360 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 92%        |
| TF3000A48K                | 48 V         | 62.5 A        | 0-62.5 A      | 3000 W       | 480 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 92%        |
| TF3000A60K                | 60 V         | 50 A          | 0-50 A        | 3000 W       | 600 mV pk-pk                | ± 1%            | ± 1%            | ± 2%                           | 93%        |

Notes:

1. Other output voltages available, consult factory.

2. Ripple &amp; noise are measured at 20 MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF &amp; 47 uF parallel capacitor.


3. Tolerance: includes setup time tolerance, line regulation and load regulation.

4. All specifications are typical at 230 VAC, full load, at 25°C ambient unless noted.

## LED STATUS INDICATOR

| LED                      | LED Signal | Status                            |
|--------------------------|------------|-----------------------------------|
| Solid (Green)            |            | Power OK (Local Mode)             |
| Solid (Orange)           |            | Power OK (Remote Mode)            |
| Slow Blink (Green)       |            | Power Standby                     |
| Fast Blink (Red)         |            | Over Voltage Protection (OVP)     |
| Solid (Red)              |            | Over Load Protection (OLP)        |
| Intermittent Blink (Red) |            | Over Temperature Protection (OTP) |
| Intermittent Blink (Red) |            | Fan Failure                       |
| Interlace Blink (Red)    |            | Power Failure                     |



## REMOTE ON/OFF

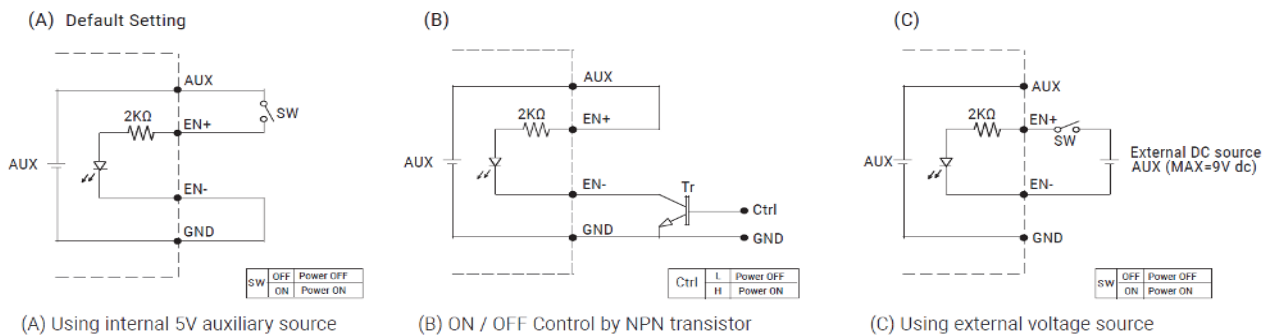


Note:

GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power (NEG-).


## DERATING CURVE

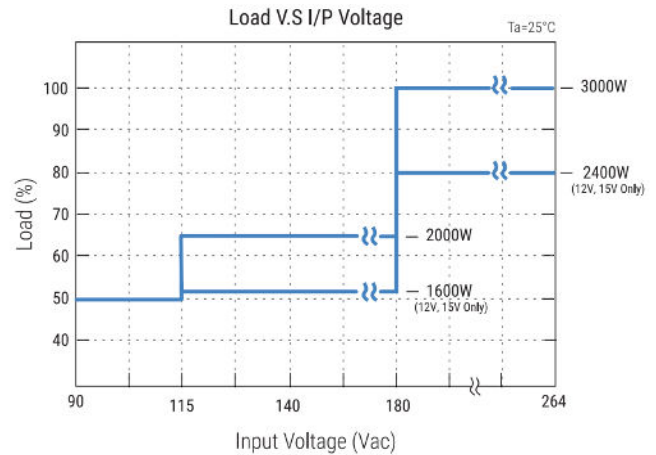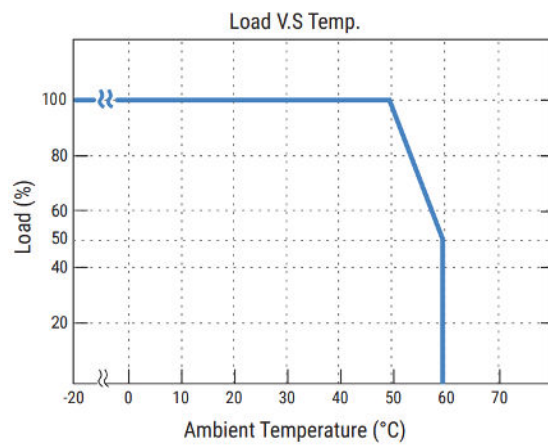


## CMD vs Output Curve

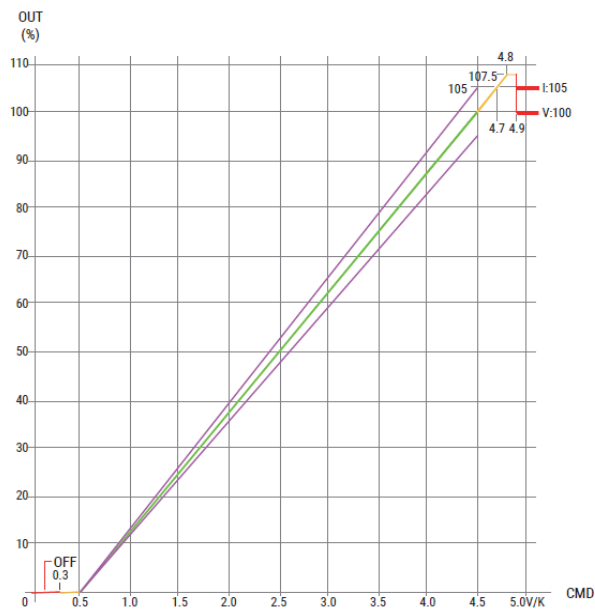

## VCI vs OVP Curve

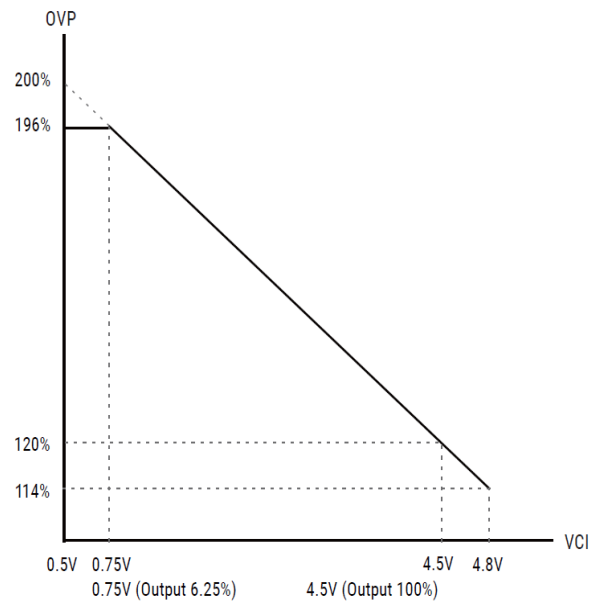

To ensure the power supply output voltage and current could be accurately adjusted, please make sure to adjust the output voltage and current > 10% vs. the rated voltage and current. (e.g. for a 24 V unit, please adjust the DC output voltage above 2.4 V to ensure accuracy; same applies to the output current)

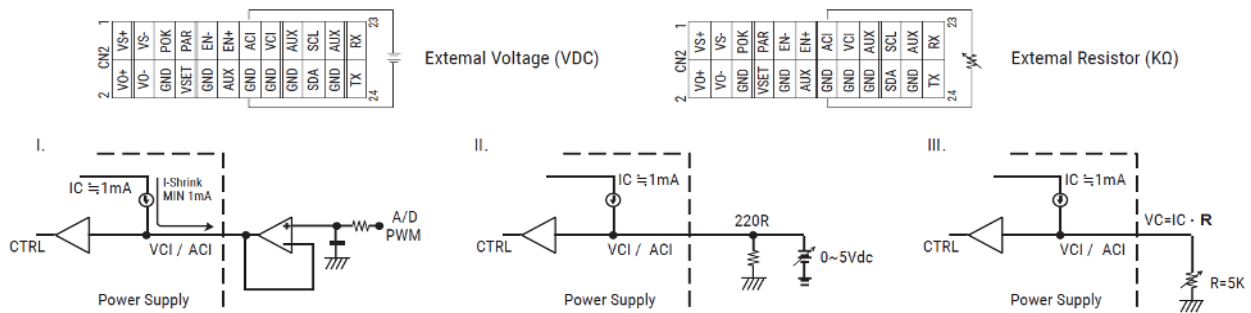


## DERATING CURVE

### Power OK Signal & Auxiliary Power Setting

The grounding of "AUX" power and P.O.K signal should be connected to "GND" port. If "VO-" is connected as Grounding, make sure to short the GND and VO- ports.

Open drain signal low when PSU turns on. Max.


P.O.K sink current: 20 mA, Max, drain voltage: 40 V.

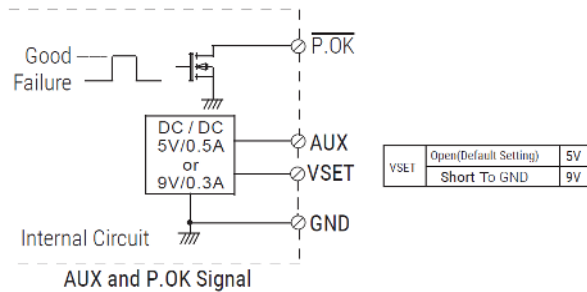

Note:


GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power (NEG-).

Place an additional capacitor to have a better performance of auxiliary power operation.




## REMOTE SENSE

## Remote Sense

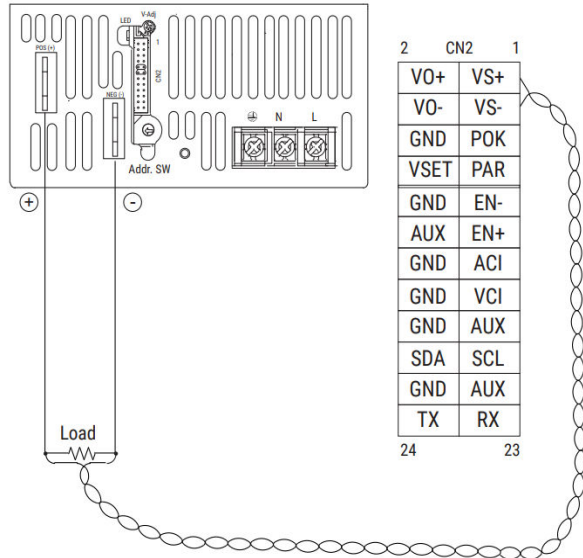


VS-, VS+ Compensation Voltage = <0.5V

## Local Sense (Default Setting)

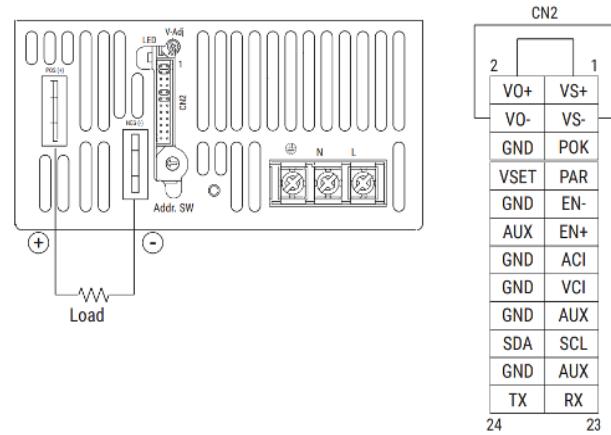


## Current Sharing

## Current Sharing with Remote Sensing (Parallel Connection)

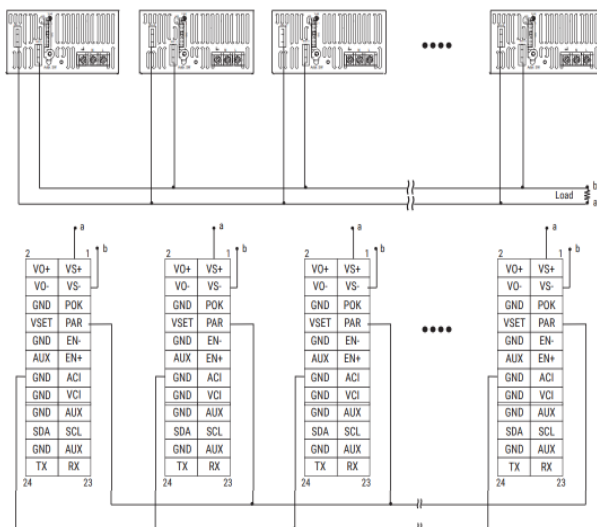

Connect PAR pins together for current sharing function

## Current Sharing with Local Sensing

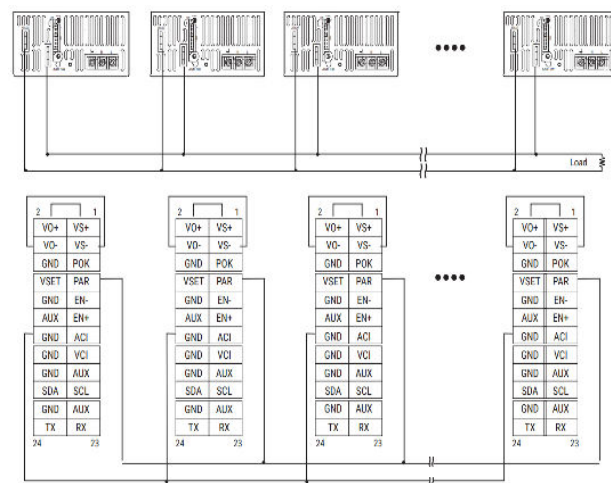


Connect PAR pins together for current sharing function



## MOUNTING INSTRUCTIONS


Recommended Standard Mounting Configurations:

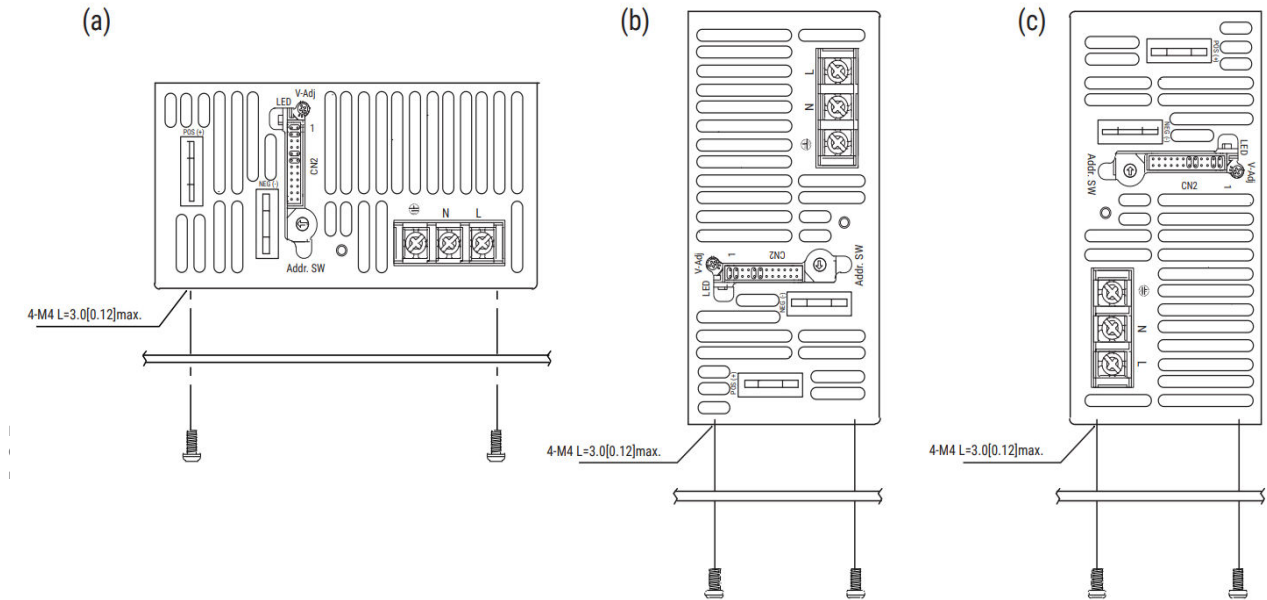


Notes:

1. Recommended screw length is measured from the power supply surface.
2. Ventilating holes on the front and back side panels should not be obstructed. Allow min. 50 mm space for air flow. See below.
3. Recommended torque of M4 mounting screws is 1.27 N · m (13.0 kgf · cm).


More than 50mm

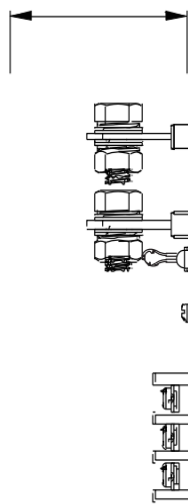

Air flow



More than 50mm

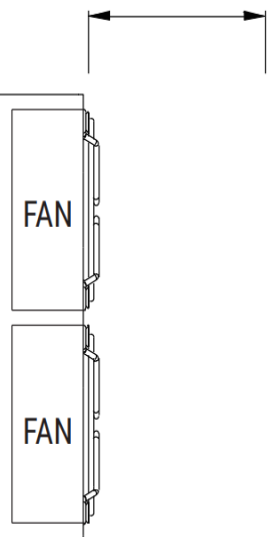

Disclaimer: The information and specifications contained herein are believed to be correct at the time of publication. However, AE accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.



For international contact information,  
visit [advancedenergy.com](https://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

**PRECISION | POWER | PERFORMANCE | TRUST**

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2025 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.