

Trek Model 603

Piezo Driver/Power Amplifier



The Trek Model 603 is a high-voltage DC power amplifier/piezo driver designed to provide precise control of output voltages in bipolar or unipolar ranges that are customer specified within a range of available settings. The instrument achieves the accurate output responses and high slew rates demanded by reactive loads by utilizing a four-quadrant active output stage that sinks or sources current into reactive or resistive loads.

The Model 603 is configured as a non-inverting amplifier. An inverting configuration is optionally available. Both configurations are available in single or dual channel packaging. They are operable on a bench top or in a 19-in rack.

Key Specifications

- Available Voltage Ranges: 0 to ± 125 V DC or peak AC or 0 to -250 V DC or peak AC or 0 to +250 V DC or peak AC
- Output Current Range: 0 to ± 40 mA DC or ± 80 mA peak AC for less than 1 ms
- Slew Rate: Greater than 100 V/ μ s
- Large Signal Bandwidth (5% distortion): DC to greater than 150 kHz
- DC Voltage Gain: 50 V/V or 25 V/V


Typical Applications Include

- Driving piezoelectric actuators
- Modulating electrooptics
- Electrostatically controlling ion beams
- Providing remote ON/OFF capabilities for automated or computer controlled systems

Features and Benefits

- Four-quadrant output for driving capacitive loads
- Up to two independent amplifier channels in one enclosure
- Short-circuit protected for equipment protection
- Reprogrammable factory-set output configurations
- All solid-state design for maintenance free operation
- Low output noise for ultra-accurate outputs
- NIST-traceable Certificate of Calibration provided with each unit
- CE compliant

Model 603

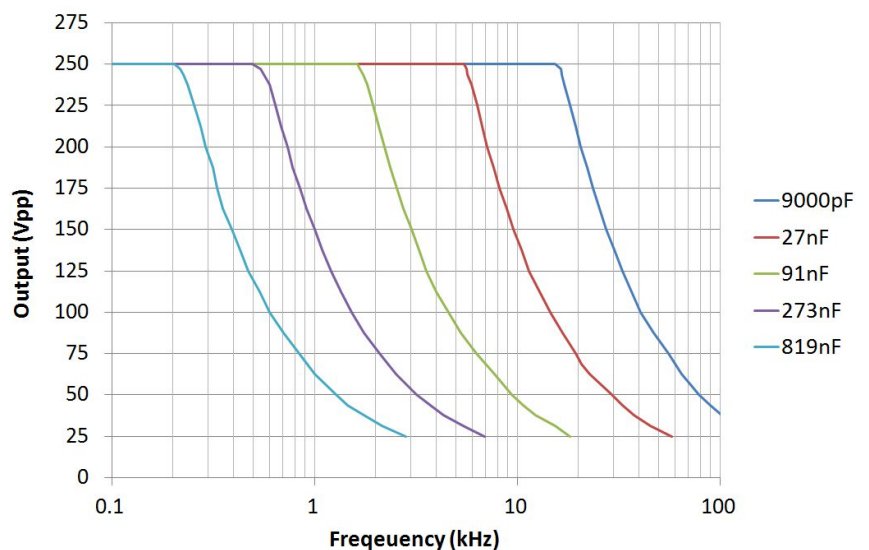

Model 603 Specifications

Performance

Available Output Voltage Ranges	0 to ± 125 V DC or peak AC 0 to -250 V DC or peak AC 0 to $+250$ V DC or peak AC
Output Current	± 40 mA DC ± 80 mA peak AC, for less than 1 ms
DC Voltage Gain	50 V/V (a gain of 25 V/V is available)
DC Voltage Gain Accuracy	Better than 0.1% of full scale
DC Offset Voltage	Less than ± 500 mV
Output Noise*	Less than 20 mV rms
Slew Rate (10% to 90%, typical)	Greater than 100 V/ μ s
Large Signal Bandwidth (5% distortion)	DC to greater than 150 kHz
Settling Time to 1%	Less than 5 μ s for a 100 V step
Stability	
<i>Drift with Time</i>	Less than 100 ppm/hr, noncumulative
<i>Drift with Temperature</i>	Less than 25 ppm/ $^{\circ}$ C

Amplifier Input

Input Voltage Range	0 to ± 10 V DC or peak AC, noninverting
Input Impedance	10 k Ω , nominal

Voltage Monitor

Ratio	1/25th of the high voltage output
DC Accuracy	Better than 0.1% of full scale
AC Accuracy	Calibrated using a Ross Model VD30-4.1-BD-KC-ALU high voltage divider
DC Offset Voltage	Less than 5 mV
Output Noise	Less than 5 mV rms*
Output Impedance	0.1 Ω

Current Monitor

Ratio	0.1 V/mA
DC Accuracy	Greater than 1% of full scale
Offset Voltage	Less than 10 mV
Output Noise	Less than 10 mV rms*
Output Impedance	0.1 Ω

Features

Output Voltage Configuration	Factory set for 0 to ± 125 VDC or peak AC. Other ranges available.
------------------------------	--

Features (cont.)

Digital Enable	An input providing a connection for a TTL compatible signal to turn on/off the HV output
Load Range Switch	Slide switch to select high or low capacitive loads (more than 150 pF or less than 150 pF)
Dynamic Adjustment	Graduated 1-turn panel potentiometer is used to optimize the AC response for various load parameters.

Mechanical

Dimensions <i>Single Channel Instrument</i>	222.3 mm H x 108 mm W 381 mm D (8.75" H x 4.25" W x 15" D)
<i>Double Channel Instrument</i>	433.8 mm H x 108 mm W 381 mm D (17" H x 4.25" W x 15" D)
Weight <i>Single Channel Instrument</i>	4.3 kg (9.4 lb)
<i>Double Channel Instrument</i>	8.6 (18.8 lb)
HV Connector	SHV High Voltage Connector
BNC Connectors	Power Switch, Amplifier Input, Voltage Monitor, Current Monitor, High Voltage ON/OFF, Digital Enable

Operating Conditions

Temperature	0 $^{\circ}$ C to 40 $^{\circ}$ C (32 $^{\circ}$ F to 104 $^{\circ}$ F)
Relative Humidity	To 85%, noncondensing
Altitude	To 2000 meters (6561.68 ft.)

Electrical

Line Voltage	Factory Set for one of two ranges: 90 to 127 V AC or 180 to 250 V AC, either at 48 to 63 Hz
AC Line Receptacle	Standard 3-prong with integral fuse holder
Power Consumption	125 VA, maximum
HV Cable	2 m, 66 pF per foot

Supplied Accessories

Operators' Manual	PN: 23166
HV Output Cable	PN: 43874
Line Cord	N5002
Spare Fuses	Selected per geographic destination

Optional Accessories

19" Rack Mount Kit	Model 603RA
Half-Rack Mount Kit	Model 604RA (3 1/2" Buckeye)
Dual Instrument Rack Mount Kit	Model 603RA-2

*Measured using the true rms feature of the Hewlett Packard 34401A digital multimeter

Copyright © 2012 TREK, INC. All specifications are subject to change. 1230/DEC



Measurement and Power Solutions™



HVP High Voltage Products GmbH | +49 89 864 6677-0 | info@hvproducts.de | www.hvproducts.de