




Features

- Ultra fast reverse recovery time for high efficiency
- Molded plastic body, ANSI/UL94 V-0 rated material
- Axial leaded device
- RoHS compliant based on exemption: [2011/65/EC, Annex III, 7(a)]

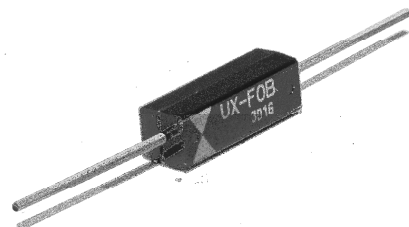

Device Electrical Characteristics

(25°C ambient temperature unless stated otherwise)

	Conditions	Symbol	Value
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	8,000 Volts
Average Forward Current maximum	$T_A = 55^\circ\text{C}$	I_{FAVM}	500 mA
Maximum Forward Voltage Drop	$I_F = 400\text{mA}$	V_F	12 Volts
Maximum Surge Current rating	8.3msec, half sine	I_{FSM}	20 Amps
Maximum Reverse Current	at rated V_{RRM}	I_R	0.5 μA
Maximum Reverse Recovery Time	$I_F = 250\text{mA}$, $I_R = 0.5\text{A}$, $I_{RR} = 125\text{mA}$	T_{RR}	40 nsec
Typical Virtual Junction Capacitance	$f = 1\text{Mhz}$, $V_r = 0\text{VDC}$	C_j	7.7 pf
Maximum Junction Temperature	-	T_J	150°C
Storage Temperature range	-	T_{STG}	-40°C to 150°C

Mechanical Data

	Symbol	Min.		Max.	
		in.	mm	in.	mm
Body length	A	-	-	0.87	22
Body diameter (Square, rectangular body)	D	-	-	0.30	7.5
Lead length	B	0.87	22	-	-
Lead diameter	C	-	-	0.047	1.2

