



HVP

High Voltage Products. High Voltage Experts.

SPL-A Series

Microprocessor-Controlled
Air Ionizer Power Supply

- 24VDC and Universal AC Input Versions
- Up to 50W of output power
- Unlimited output arc and short-circuit protection
- Multiple Status Indicator LEDs
- Ionizer and collector outputs
- Fixed or user-adjustable ionizer output (50% to 100% output)
- Over-voltage, over-current, over temperature shutdown
- Auto reset of faults
- Available in positive or negative versions
- Software customizable performance




Conditions	Value	Units
Input		
Input Voltage	All Versions	108 - 264Vac / 21 - 28Vdc
Power	At Max load	65 W
Output		
Voltages Available	Primary Output / Auxiliary Output	15 / 7.5 kV DC max
Voltage Adjustment	0 - 5 VDC Input	50% to max Vo
Power	Nominal Input, Max Vo	50 W
Current, Primary Output	Nominal Input, Max Vo	3.4 mA
Regulation, Primary Vo	Any Static Load, Max Vo	<0.2% V DC
Ripple	Full Load, Max Vo	<3% V p-p
Line Regulation	Over input V range, Full Power	<0.1% V DC
Stability	Over 8hr, 30 min warm up	<0.2% V DC
Current, Alternate Output	Nominal Input, Max Vo, unregulated	300 uA
Control & Monitoring		
Over Voltage	Purple	10ma sink
Over Current	Red	5ma sink
Under Voltage	Blue	5ma sink
Over Temperature	Yellow	10ma sink
Normal Operation	Green	5ma sink
Environmental		
Operating Temperature	Case Temp, Full Load, Max Vo	0 to +60 °C
Temp. Coefficient	Over the Operating Temperature	0.05 %/°C
Storage	Non-Operating, Case Temp	-40 to +85 °C
Humidity	Non-Condensing	0 to 95% RH
Altitude	Standard Operating Conditions	0 to 10000 Feet



HVP

High Voltage Products. High Voltage Experts.

SPL-A Series

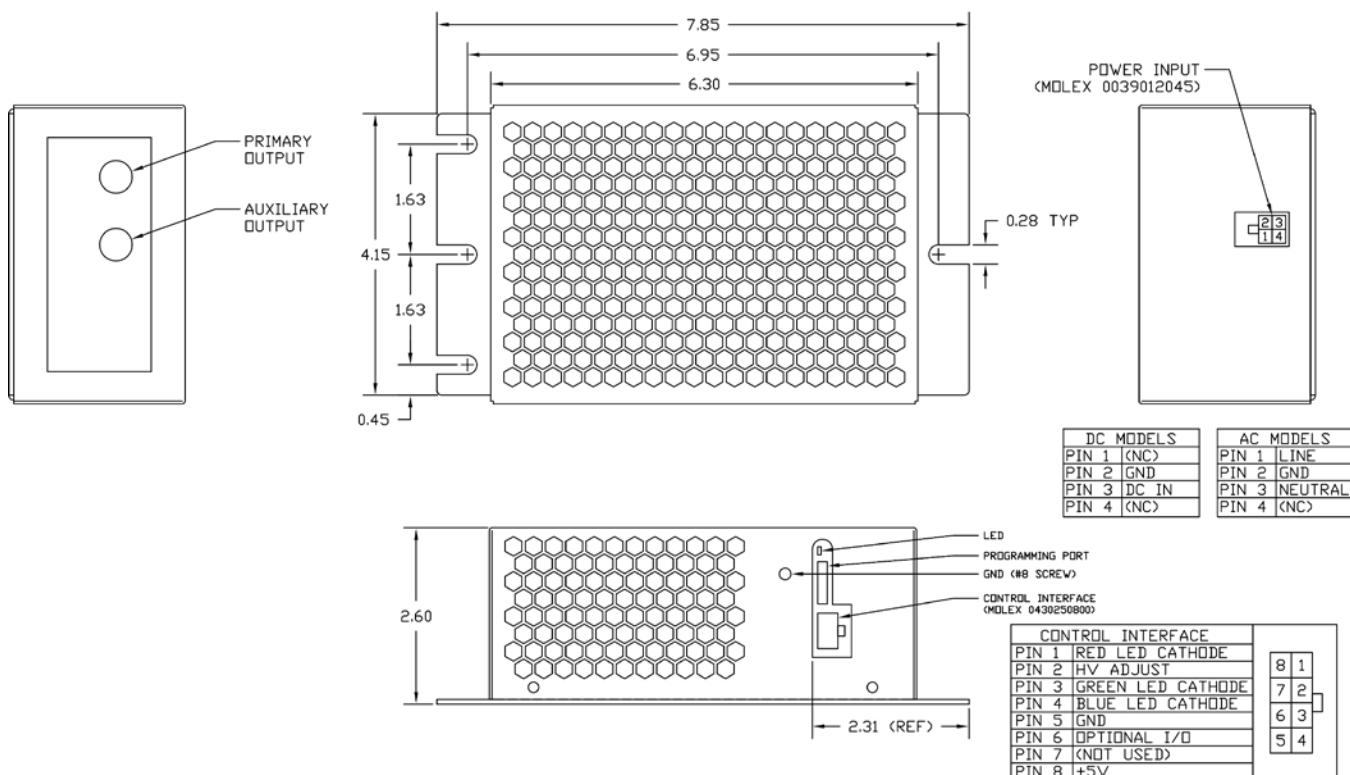

Part Number	Input Voltage	Output Voltage	Collector Output (50% of Ionizer)	Polarity	Output Power
SPL-A-AC-15P50	AC Input (108 – 264 VAC)	7.5kV to 15kV	3.75kV to 7.5kV	Positive	50 Watts
SPL-A-AC-15N50	AC Input (108 – 264 VAC)	-7.5kV to -15kV	-3.75kV to -7.5kV	Negative	50 Watts
SPL-A-DC-15P50	DC Input (21 – 28 VDC)	7.5kV to 15kV	3.75kV to 7.5kV	Positive	50 Watts
SPL-A-DC-15N50	DC Input (21 – 28 VDC)	-7.5kV to -15kV	-3.75kV to -7.5kV	Negative	50 Watts

Additional Features:

- Fixed outputs available with Universal input
- Factory adjustable fault set points
- Factory programmable soft start options
- LED configurations factory adjustable
- Voltage step down function on fault available
- Factory adjustable time delay on fault restarts
- Factory adjustable fault lockout counter
- Contact factory for custom requests!

