

ET Series 2000W Regulated High Voltage DC Power Supplies

1 kV to 60 kV
Rack Mount
3.5 Inch Panel
Height...

Laboratory
Performance...

CE and Semi
S2-93 Compliant

The ET Series of 2000 watt high voltage supplies feature flexible embedded controls with low ripple and noise. They are air insulated, fast response units, with tight regulation and extremely low arc discharge currents.

Please refer to Technology > Applications page on our web site for typical applications

The ET Series are fully compliant with the Following European Directives:
EN61010/ IEC1010, Safety
EN61000-6-4, Conducted and Radiated Emissions
EN61000-6-2:2005, Conducted and Radiated Immunity



Models from 0 to 1 kV through 0 to 60 kV, 3.5" H x 22.0" D, 21 lbs.

Features:

Arc Quench. The HV output is inhibited for a short period after each load arc to help extinguish the arc.

Arc Count. Internal circuitry constantly senses and integrates arcs that occur over a given time. In the event a system or load arcing problem develops and exceeds factory-set parameters, the power supply will cycle off in an attempt to clear the fault and then automatically restart after a pre-set "off dwell time".

Pulse-Width Modulation. Off-the-line pulse-width modulation provides high efficiency and a reduced parts count for improved reliability.

Embedded Microcontroller control. Front panel digital encoders provide high resolution local adjustment of voltage and current program. Integral RS-232, USB and optional ethernet communications provide remote control program and monitor.

Low Ripple. Typically, ripple is less than 0.025% RMS of rated voltage at full load.

Air Insulated. The ET Series features "air" as the primary dielectric medium. No oil or encapsulation is used to impede serviceability or increase weight.

Constant Voltage/Constant Current Operation. Automatic crossover from constant-voltage to constant-current regulation provides protection against overloads, arcs, and short circuits.

Redundant Thermal Overload Protection. Thermostats and fan RPM sensing shut down the power supply due to over temperature or reduced fan speeds.

Tight Regulation. Voltage regulation is better than 0.005% for allowable line and load variations. Current regulation is better than 0.1% from short circuit to rated voltage.

Constant Current/Current Trip. A rear panel switch allows selection of either current mode.

Slow Start. Adjustable ramp time from 0 - 30 seconds. Output ramps from 0 V to programmed voltage level.

Warranty. Standard power supplies are warranted for three years; OEM and modified power supplies are warranted for one year. A formal warranty statement is available.

Designing Solutions for High Voltage Power Supply Applications

HVP

High Voltage Products. High Voltage Experts.

HVP High Voltage Products GmbH Bunsenstr. 5 82152 Martinsried/Planegg +49 89 891 374 80

www.hvproducts.de
info@hvproducts.de

Specifications

(Specifications apply from 5% to 100% rated voltage. Operation is guaranteed down to zero voltage with a slight degradation of performance.)

Input: 198 to 264 VRMS single-phase, 48-63 Hz, 4000 VA maximum at full load. C20 connector per IEC 60320 with mating line cord.

Efficiency: Typically greater than 85% at full load.

Output: Continuous, stable adjustment, from 0 to rated voltage or current by panel mounted optical rotary encoder or by external +10V signals. Voltage accuracy is 0.5% of setting + 0.2% of rated. Optical rotary encoder resolution: 0.025% with "Fine Adjustment" mode selected. 0.25% with "Coarse Adjustment" mode (default). Repeatability is < 0.1% of rated.

Static Voltage Regulation: Better than $\pm 0.005\%$ for specified line variations and $0.005\% + 1 \text{ mV/mA}$ for no load to full load variations.

Dynamic Voltage Regulation: For load transients from 10% to 99% and 99% to 10%, typical deviation is less than 2% of rated output voltage with recovery to within 1% in 500 us and recovery to within 0.1% in 1 ms.

Ripple: Better than 0.025% of rated voltage + 1 V RMS at full load.

Current Regulation: When in current regulation mode, better than 0.1% from short circuit to rated voltage at any load condition.

Voltage Monitor: 0 to +10 V equivalent to 0 to rated voltage. Accuracy: 0.5% of reading + 0.2% of rated. Impedance is $10 \text{ K}\Omega$.

Current Monitor: 0 to +10 V equivalent to 0 to rated current. Accuracy: 1% of reading + 0.1% of rated. Impedance is $10 \text{ K}\Omega$.

Stability: 0.01% per hour after 1/2 hour warm-up, 0.05% per 8 hours.

Rise/Decay Time Constant: The voltage rise time constant is 50 ms typical for all models using either HV enable or remote programming control. The voltage decay time constant is 50 ms with a 15% resistive load.

Temperature Coefficient: 0.01% /°C.

Ambient Temperature: -20 to +40° C, operating; -40 to +85° C, storage.

Polarity: Available with either positive, negative or reversible polarity with respect to chassis ground.

Protection: Automatic current regulation protects against all overloads, including arcs and short circuits. Thermal switches and RPM sensing fans protect against thermal overload. Fuses, surge-limiting resistors, and low energy components provide ultimate protection.

Arc Quench: An arc quench feature provides sensing of each load arc and quickly inhibits the HV output for approximately 20 ms after each arc. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

Arc Count: Internal circuitry senses the number of arcs caused by external load discharges. If the rate of consecutive arcs exceeds approximately one arc per second for five arcs, the supply will turn off for approximately 5 seconds to allow clearance of the fault. After this period the supply will automatically return to the programmed kV value with the rise time constant indicated. If the load fault still exists, the above cycle will repeat. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

External Interlock: Open = off, closed = on. Normally latching except for blank front panel version where it is non-latching.

Remote HV Enable/Disable: 0 - 1.5 V = OFF, 2.5 - 15 V = ON.

RS232/USB/Ethernet Programming and Monitor Accuracy:

Resolution: 0.025% of full scale for both the voltage and the current programs. 0.1% of full scale for both the voltage and the current monitors

Remote setting accuracy: Voltage setting accuracy is better than 0.5% of setting + 0.2% of rated.

Remote reading accuracy: Voltage reading accuracy is 0.5% of reading + 0.2% of rated. Current reading accuracy is 1% of reading + 0.1% of rated.

Front Panel Elements.

Output Voltage & Current Display: 3.5 Digit digital meters. 1250 count maximum.

Indicators: AC Power, Current Mode, Voltage Mode, Pol +, Pol -, Fault, Fine Adjustment, Preset, Control Lock, Remote Enable, Remote Program, HV On.

AC Power: Rocker switch

Switches (momentary): HV On, SS Slope, Standby, Remote Enable, Remote Program, Preset, Fine Adjust, Control Lock.

Rotary Encoders: Voltage Adjust, Current Adjust..

Rear Panel Elements. AC power entry connector, fuses, power on indicator, ground stud, HV output connector, remote interface connector, RS232/USB connectors, and current trip switch.

The signals provided on the remote interface connector are as follows:

Inputs: Safety interlock, output voltage and current program signals, high voltage enable and remote HV on.

Outputs: Output voltage and current monitor signals, HV status, fault status, I/V mode status and a +10 V reference source.

Signal common and ground reference terminals are also provided.

Accessories: Detachable, 8 foot, shielded high voltage coaxial cable (see models chart for cable type), 8 foot NEMA 6-20P line cord, 10 foot null modem cable and 10 foot USB cable are provided.


Weight: Approximately 21 lbs.

Options

Symbol	Description
200	200 VAC ± 10%, 48 - 63 Hz. Derate current by 10%, maximum 1800W..
NC	Blank front panel, power switch and indicator only.
ZR	Zero start interlock. Voltage control, local or remote, must be at zero before the HV will enable.
5VC	0-5 V voltage and current program/monitor.
ARC	Arc count and quench as described in the specifications for 1 - 6 kV models.
AC	Arc Count Only
AQ	Arc Quench Only
ETH	Virtual RS-232 COM port over Ethernet network. (Requires compatible OS (eg Windows) for COM drivers)

Models

Positive Polarity	Negative Polarity	Reversible Polarity	Output Voltage	Output Current	Max Stored Energy	Output Cable	
REVERSIBLE POLARITY ONLY			ET1R2000	0-1kV	0-2000mA	1.0J	RG-58U
			ET1.5R1300	0-1.5kV	0-1300mA	1.9J	RG-58U
			ET2R1000	0-2kV	0-1000mA	2.4J	RG-58U
			ET3R660	0-3kV	0-660mA	2.0J	RG-58U
			ET5R400	0-5kV	0-400mA	2.1J	RG-58U
			ET6R330	0-6kV	0-330mA	1.4J	RG-58U
ET8P250	ET8N250	ET8R250	0-8kV	0-250mA	1.2J	RG-8U	
ET10P200	ET10N200	ET10R200	0-10kV	0-200mA	1.4J	RG-8U	
ET12P165	ET12N165	ET12R165	0-12kV	0-165mA	2.0J	RG-8U	
ET15P132	ET15N132	ET15R132	0-15kV	0-132mA	2.1J	RG-8U	
ET20P100	ET20N100	ET20R100	0-20kV	0-100mA	2.8J	RG-8U	
ET25P80	ET25N80	ET25R80	0-25kV	0-80mA	2.9J	RG-8U	
ET30P66	ET30N66	ET30R66	0-30kV	0-66mA	4.2J	RG-8U	
ET40P50	ET40N50	ET40R50	0-40kV	0-50mA	4.3J	RG-8U	
ET50P40	ET50N40	ET50R40	0-50kV	0-40mA	5.3J	RG-8U	
ET60P33	ET60N33	ET60R33	0-60kV	0-33mA	6.2J	RG-8U	

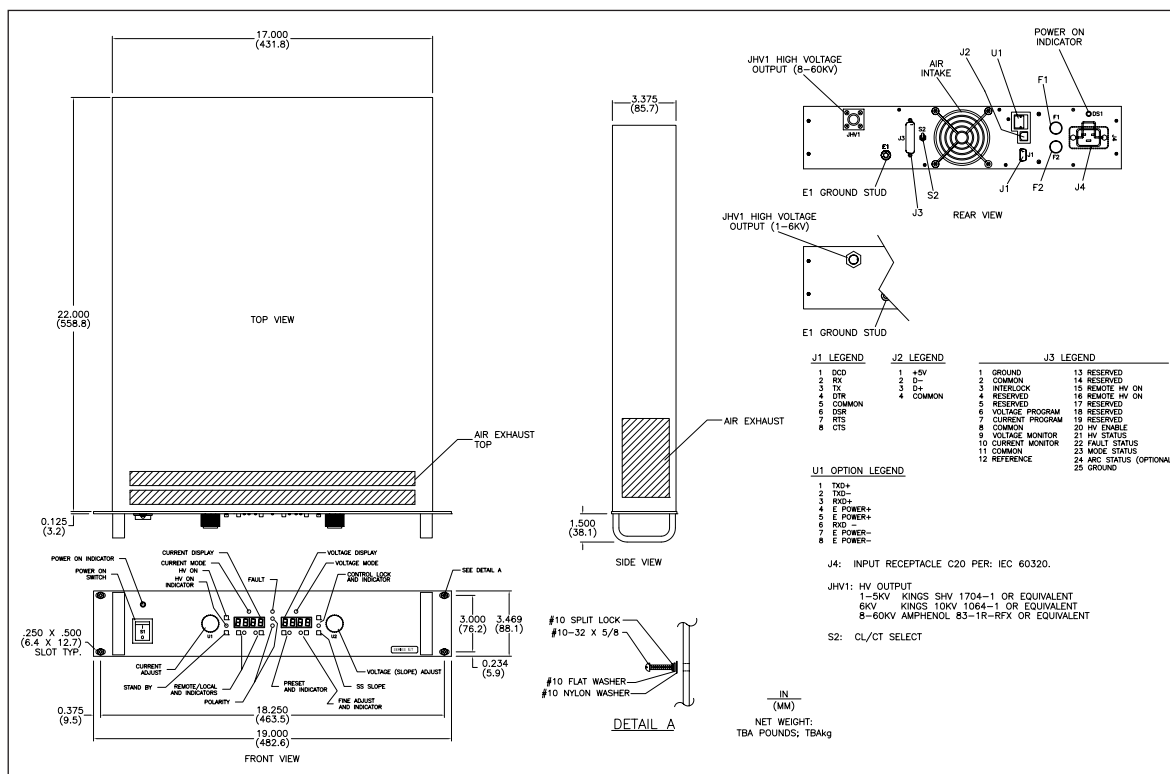

Designing Solutions for High Voltage Power Supply Applications



High Voltage Products. High Voltage Experts.

www.hvproducts.de
info@hvproducts.de

HVP High Voltage Products GmbH Bunsenstr. 5 82152 Martinsried/Planegg +49 89 891 374 80