


# ULTRAVOLT FIL SERIES

## PRECISION FILAMENT SUPPLY

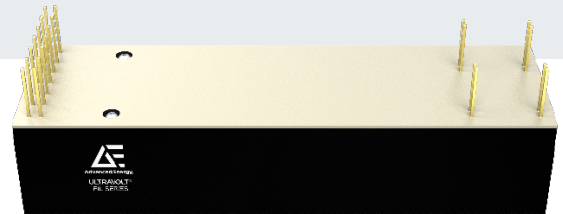

The FIL Series is a non-isolated precision filament supply. This line of regulated DC-DC converters addresses the needs of the high precision and high stability power supply user. Designed and built utilizing a state-of-the-art power-conversion topology, these units feature surface-mount technology and encapsulation techniques that provide high reliability and low cost. The FIL Series supply allows users to properly operate the filament to maximize performance and extend its life.

### PRODUCT HIGHLIGHTS

- High precision and high stability
- 15 PPM temperature coefficient
- 0 to 5 VDC
- 0 to 3 Amps of current
- Maximum load capability down to 0 Volts
- Programmable voltage and current controls
- Indefinite output short-circuit protection
- Buffered output current and voltage monitors

- Excellent linearity and accuracy of control
- Current mode and voltage mode indicator
- Synchronizable

### TYPICAL APPLICATIONS

- Precision filaments for use in
  - mass spectrometry
  - electron beams
  - test equipment


## ELECTRICAL SPECIFICATIONS

Parameter	Conditions	Models	Units
<b>Input</b>		<b>All Types</b>	
Operating Range	All Conditions	+24 ±10	VDC
Current	Full Load Output	900 mA Typical	mA
<b>Output</b>		<b>All Types</b>	
Voltage Range	Nominal Input	0 to 5	VDC
DC Current Range	Nominal Input	0 to 3	Amps
Voltage Range	Derated	0 to 5.7	VDC
DC Current Range	Derated	0 to 3.3	Amps
Voltage Monitor Scaling	Full Load	10	VDC
Current Monitor Scaling	Full Load	10	VDC
<b>Programming &amp; Controls</b>		<b>All Types</b>	
Input Impedance	Nominal Input	+ Output Models 10 MΩ to GND	MΩ
Adjust Resistance	Typical Potentiometer Values	10 K to 100 K (Pot across Vref. and Signal GND, Wiper to Adjust)	Ω
Adjust Voltage	Referenced to signal ground	0 to +10 VDC	VDC
Accuracy	In current control	±0.1%	Amps
Offset	Voltage control	0.04%	VDC
Offset	Current control	0.001%	Amps
Output Voltage	T=+25°C, Initial Value	+10.0V ±0.05%	VDC
Enable/Disable		0 to +0.5 Disable, +2.4 to 10 Enable (Default = Enable)	VDC
<b>Environmental</b>		<b>All Types</b>	
Operating	Full Load, Max Eout, Case Temp.	+10 to +45°C	
Coefficient	Over the Specified Temperature	≤15 ppm/°C	
Thermal Shock	Mil-Std 810, Method 503-4, Proc. II	-40 to +65°C	
Storage	Non-Operating, Case Temp.	-55 to +85°C	
Altitude	All Conditions, Standard Package	Sea Level through Vacuum	
Shock	Mil-Std-810, Method 516.5, Proc. IV	20 Gs	
Vibration	Mil-Std-810, Method 514.5, Fig.514.5C-3	10 Gs	

## MECHANICAL SPECIFICATIONS

## Input/Output Wiring Diagram


The filament power supply load should be connected between the FIL(+) output and the FIL(-) output, load current should not flow through the center tap, which is common with the (+)24V return. The FIL(-) or FIL(+) outputs should not be grounded.

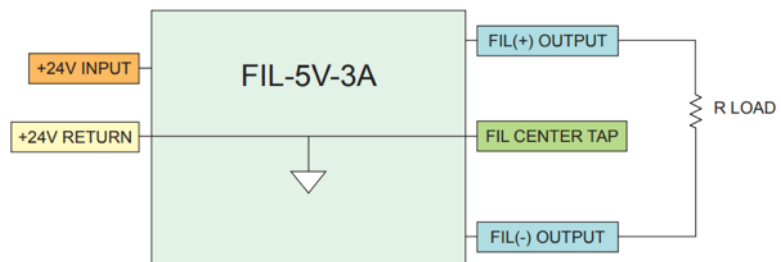

## MECHANICAL SPECIFICATIONS (CONTINUED)

Construction	
Case	Epoxy-filled DAP box cer tified to ASTM-D-5948
Volume	6.35 in <sup>3</sup> (104 cc)
Weight	6.75 oz (191 g)
Tolerance	Overall ±0.050" (1.27 mm)
	Pin to Pin ±0.015" (0.38 mm)
	Mounting hole locations ±0.025 " (0.64 mm)

\*-M equipped units are an additional 0.030" (0.76) in height. Contact Advanced Energy for drawings of models equipped with -E or -H options.

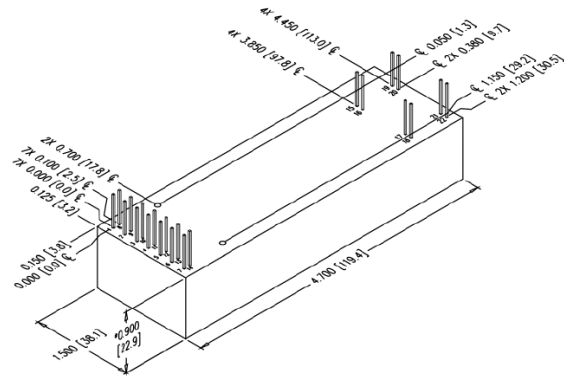

## INTERFACE

Connections	
Pin	Function
1 and 8	Input-Power Ground
2 and 9	Positive Power Input
3	Iout Monitor
4	Enable/Disable
5	Signal Ground
6	Voltage Programming
7	+10 V Reference Output
10	Sync In

Connections	
Pin	Function
11	Imode Indicator
12	Vmode Indicator
13	Current Programming
14, 17 and 18	Vout Monitor
15 and 16	Fil Output (-)
19 and 20	Fil Output (+)
21 and 22	Center Tap

All grounds joined internally.

## ORDERING INFORMATION

Standard Features		
Type	0 to 5 VDC Output	FIL-5V
Current	Current Output (0 to 3 A)	-3A
Case	'Eared' Chassis Mounting Plate	-E
Heat Sink	.400" High (sized to fit case)	-H
Shield	Six-sided Mu-Metal Shield	-M

**Example:**

**FIL-5V-3A-M**

