



HVSB SERIES

100 to 200kV, 220mA, 100nS to Standard Recovery
X-ray Board Rectifiers



Features

- High Voltage, Medium Current Handling Assembly
- Fast Recovery Models Available

Specifications¹


Part Number	V _{RRM} V	I _{FAVM} mA	V _F V	I _R μA	I _{FSM} A	T _{RR} ² nS	L in.	C in.	D in.
Standard Recovery Subseries									
HVSB100	100000	220	140	2	20	-	4.17	3.85	0.16
HVSB150	150000	220	182	2	20	-	4.17	3.85	0.16
HVSB200	200000	220	224	2	20	-	4.17	3.85	0.16
Fast Recovery Subseries									
HVSBF100	100000	220	308	2	10	100	4.17	3.85	0.16
HVSBF150	150000	220	364	2	10	100	4.17	3.85	0.16
HVSBF200	200000	220	364	2	10	100	4.17	3.85	0.16

Temperature °C	
Operating Temperature	-55 to 125
Storage Temperature	-55 to 150

¹25°C ambient temperature unless stated otherwise

²A "-" indicates that the component is a standard recovery device and no T_{RR} data is taken.

Drawings

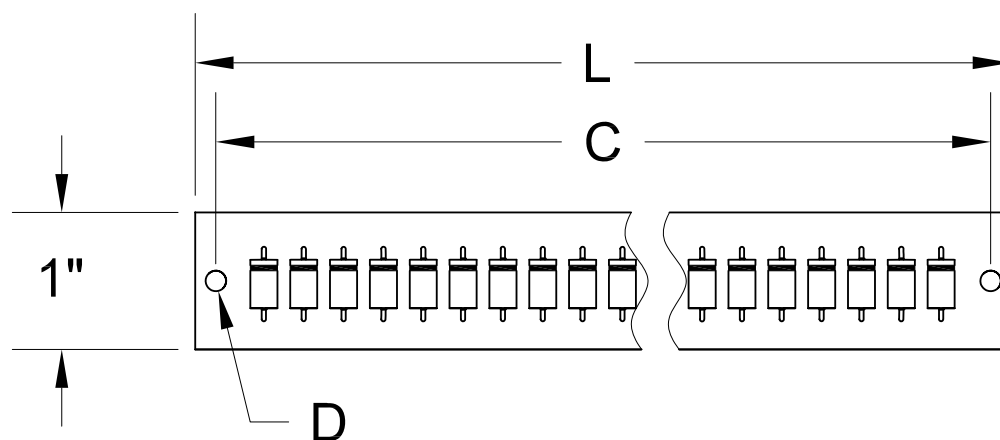

Dimensions in inches, tolerances ±0.020 except as noted



Specification Definitions

Specifications		Conditions
V_{RRM}	Maximum Repetitive Reverse Voltage	-
I_{FAVM}	Maximum Average Forward Current	At T _{OIL} = 55°C
V_F	Maximum Forward Voltage Drop	At I _{FAVM}
I_R	Maximum Leakage Current	At V _{RRM}
I_{FSM}	Maximum Surge Current	At 8.3 mS, Single Half Sine
T_{RR}	Maximum Reverse Recovery Time	I _F = 40mA; I _R = -80mA; I _{RR} = -20mA

Note: Specifications subject to change without notice. Photo is representation only.

