


APPLICATIONS

- Switch Mode Power Capacitor
- for Input / Output Filtering

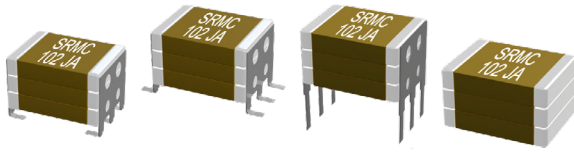

FEATURES

- High reliability, 100% burn-in
- Low ESR and ESL design
- High frequency switch
- Custom designs with any size, voltage, capacity, leads...
- Marking

ELECTRICAL PARAMETERS

ELECTRICAL CHARACTERISTICS :
at + 25°C unless otherwise specified

OPERATING TEMPERATURE :
- 55°C, + 125°C

TEMPERATURE COEFFICIENT :
NPO : ± 30ppm
N2T : 2200 ± 350 ppm/°C
X7R : ± 15% with 0Vdc applied

DISSIPATION FACTOR:
NPO : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
N2T : ≤ 1.10⁻³ at 1Vrms and 1MHz for values ≤ 1000pF
 ≤ 1.10⁻³ at 1Vrms and 1KHz for values > 1000pF
X7R : ≤ 0.025 at 1kHz

INSULATION RESISTANCE (IR) :
25°C/Un 10⁵ MOhm or 1000 Ohm-Farad whichever is less
125°C/Un 10⁴ MOhm or 100 Ohm-Farad whichever is less

DIELECTRIC STRENGTH TEST :
1.2Un for 5s with 50mA max charging current

BURN IN :
48 hours 125°C 1.5 Un


ORDERING INFORMATION

SRMC	2225	Y	102	J	G		L	100	-	B	-
SERIES	SIZE	DIELECTRIC	CAPACITANCE	TOLERANCE	VOLTAGE	TERMINATION	FORM	HEIGHT (H)	COATING	PACKAGING	SPECIAL
SRMC	1812 1825 2220 2225 3033 3640 4040 40100 5550 6660 8060 80150	A = NPO P = N2T Y = X7R X = BX BY = 2C1	Expressed in picofarads (pF). The first two digits are significant, the third digit give the number of noughts. Example : 102 = 1000pF	A = ±0.05pF if < 10pF and 0.05% if > 10pF B = ± 0.1pF C = ± 0.25pF D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20%	G = 1KV H = 2KV I = 3KV L = 5KV 8 = 8KV 10 = 10KV	- P = Polymer	L J D M U = 4 leads	020 030 040 050 060 070 080 090 100 110 120 130 140 160 180	- I = Conformal Coating H = Epoxy-Coating	B = Reel V = Bulk	- BM = BME Dxx = Reliability spec Exx = Sorting spec

For J, L, M form, total height (T) is obtained by adding lead height (C/E) to specified chip height (H) in 1/10mm
For other sizes, voltage, tolerance contact us


DIMENSIONS (IN MILLIMETERS)

	1812	1825	2220	2225	2825	3033	3640	4040	40100	5550	6080	6660	8060	80150
Lenght (L)	5.10 ± 0.4	5.10 ± 0.4	6.20 ± 0.4	6.20 ± 0.4	7.70 ± 0.4	8.20 ± 0.4	9.75 ± 0.5	10.80 ± 0.5	10.80 ± 0.5	14.60 ± 0.5	15.80 ± 0.5	17.40 ± 0.5	20.90 ± 0.5	20.90 ± 0.5
Width (W)	3.20 ± 0.4	6.35 ± 0.4	5.10 ± 0.4	6.35 ± 0.4	6.35 ± 0.4	8.40 ± 0.4	10.20 ± 0.5	10.20 ± 0.5	25.40 ± 0.5	12.70 ± 0.5	20.30 ± 0.5	15.20 ± 0.5	15.20 ± 0.5	38.10 ± 0.5
Nb of Leads	3	3	3	3	4	4	4	5	5	6	7	7	9	9
Min Height (T)	2.8	3.0	3.0	3.1	3.4	3.5	3.6	4.0	4.0	4.3	4.4	4.5	4.5	4.5
Max Height (T)	9.6	16.2	16.2	16.2	16.9	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1	20.1
Lead Height (C)	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3
lead Lenght (D)	1.4 ± 0.3	1.6 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3	1.8 ± 0.3
Lead Height (E)	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3	1.3 ± 0.3
Lead Lenght (F)	4.0 ± 1.0	4.5 ± 1.0	5.0 ± 1.0	5.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0	6.0 ± 1.0

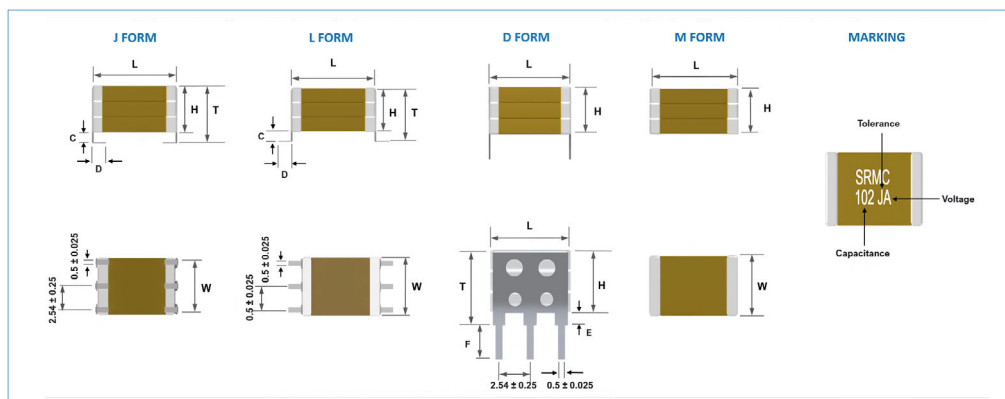

DIMENSIONS 4 WIRES (In millimeters)

	3033	3640	5550	5550	5550	6080	6080	6660	8060	40100	80150
Lenght (L)	9.20 ± 0.5	11.15 ± 0.5	16.00 ± 0.5	16.00 ± 0.5	16.00 ± 0.5	17.20 ± 0.5	17.20 ± 0.5	18.80 ± 0.5	22.30 ± 0.5	12.20 ± 0.5	22.70 ± 0.5
Width (W)	8.40 ± 0.5	10.20 ± 0.5	12.70 ± 0.5	12.70 ± 0.5	12.70 ± 0.5	20.30 ± 0.5	20.30 ± 0.5	15.20 ± 0.5	15.20 ± 0.5	25.40 ± 0.5	38.10 ± 0.5
Lead Space (S)	8.40	10.15	15.00	15.00	15.00	16.20	16.20	17.80	21.30	11.20	21.50
Lead Width (S1)	5.08	7.62	7.62	10.16	15.24	10.16	15.24	10.16	10.16	27.94	30.48
Nb 2.54 sp (x)	2	3	3	4	6	4	6	4	4	11	12
Lead diam (d)	0.8	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.2
Min Height (H)	3,5	3,6	4,3	4,3	4,3	4,4	4,4	4,5	4,5	4	4,5
Max Height (H)	20,1	20,1	20,1	20,1	20,1	20,1	20,1	20,1	20,1	20,1	20,1
Lead Lenght (F)	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0	25 ± 1.0

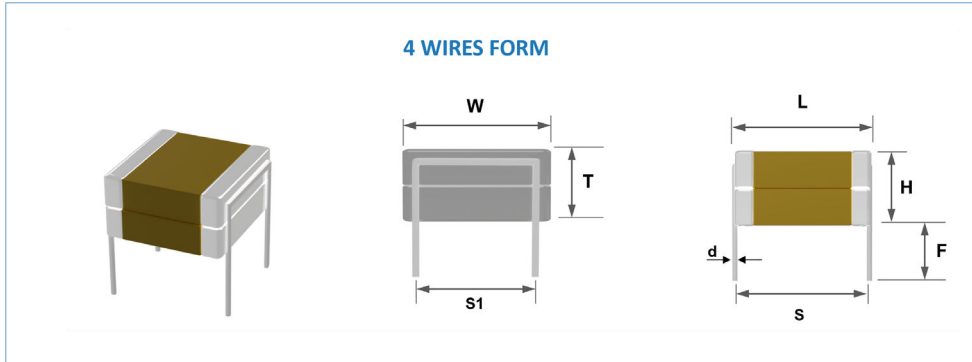

QUICK REFERENCE DATA (Max capacitance)

	1812			1825			2220			2225			3033			3640			Height H (1/10 mm)
	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	
min	12 pF	39 pF	1.0 nF	33 pF	100 pF	2.2 nF	82 pF	220 pF	470 pF	100 pF	220 pF	560 pF	180 pF	560 pF	1.2 nF	270 pF	820 pF	1.8 nF	
1KV	6.8 nF	22 nF	47 nF	18 nF	47 nF	100 nF	18 nF	56 nF	120 nF	22 nF	68 nF	150 nF	39 nF	120 nF	270 nF	56 nF	150 nF	390 nF	020
	12 nF	39 nF	100 nF	27 nF	100 nF	220 nF	27 nF	100 nF	270 nF	39 nF	120 nF	330 nF	68 nF	220 nF	560 nF	100 nF	330 nF	820 nF	040
	12 nF	39 nF	100 nF	27 nF	100 nF	220 nF	27 nF	100 nF	270 nF	39 nF	120 nF	330 nF	68 nF	220 nF	560 nF	100 nF	330 nF	820 nF	060
				82 nF	270 nF	470 nF	82 nF	270 nF	560 nF	120 nF	390 nF	680 nF	180 nF	680 nF	1.2 µF	270 nF	1.0 µF	1.8 µF	100
			120 nF	390 nF	680 nF				150 nF	470 nF	1.0 µF		270 nF	820 nF	1.8 µF	390 nF	1.2 µF	2.7 µF	140
												330 nF	1.0 µF	2.2 µF	470 nF	1.5 µF	3.3 µF	180	
2KV	1.2 nF	3.9 nF	10 nF	2.7 nF	8.2 nF	22 nF	3.3 nF	10 nF	22 nF	3.9 nF	12 nF	33 nF	8.2 nF	22 nF	56 nF	12 nF	33 nF	82 nF	020
	1.8 nF	5.6 nF	15 nF	4.7 nF	15 nF	39 nF	4.7 nF	15 nF	47 nF	5.6 nF	18 nF	68 nF	12 nF	39 nF	120 nF	18 nF	56 nF	180 nF	040
	3.9 nF	12 nF	15 nF	8.2 nF	27 nF	39 nF	10 nF	33 nF	47 nF	12 nF	39 nF	68 nF	22 nF	82 nF	120 nF	33 nF	120 nF	180 nF	060
				12 nF	47 nF	82 nF	15 nF	47 nF	100 nF	18 nF	56 nF	120 nF	39 nF	39 nF	120 nF	270 nF	56 nF	180 nF	390 nF
			22 nF	56 nF	120 nF				33 nF	82 nF	180 nF	56 nF	150 nF	390 nF	270 nF	220 nF	220 nF	560 nF	140
												68 nF	220 nF	470 nF	100 nF	330 nF	680 nF	180	
3KV	560 pF	1.5 nF	3.9 nF	1.2 nF	3.3 nF	8.2 nF	1.2 nF	3.3 nF	10 nF	1.8 nF	4.7 nF	12 nF	3.3 nF	8.2 nF	22 nF	4.7 nF	12 nF	33 nF	020
	1.0 nF	2.2 nF	6.8 nF	2.2 nF	5.6 nF	18 nF	2.7 nF	6.8 nF	18 nF	3.3 nF	8.2 nF	27 nF	6.8 nF	15 nF	47 nF	10 nF	22 nF	68 nF	040
	1.0 nF	2.2 nF	6.8 nF	2.2 nF	5.6 nF	18 nF	2.7 nF	6.8 nF	18 nF	3.3 nF	8.2 nF	27 nF	6.8 nF	15 nF	47 nF	10 nF	22 nF	68 nF	060
				6.8 nF	10 nF	33 nF	8.2 nF	12 nF	39 nF	10 nF	18 nF	56 nF	120 nF	18 nF	33 nF	100 nF	27 nF	47 nF	150 nF
			10 nF	15 nF	47 nF				12 nF	27 nF	82 nF	27 nF	47 nF	150 nF	39 nF	68 nF	220 nF	140	
												33 nF	68 nF	180 nF	47 nF	100 nF	270 nF	180	
5KV	150 pF	390 pF	1.0 nF	390 pF	1.0 nF	2.2 nF	390 pF	1.0 nF	2.7 nF	470 pF	1.5 nF	3.9 nF	1.0 nF	2.7 nF	8.2 nF	1.2 nF	3.9 nF	12 nF	020
	220 pF	680 pF	2.2 nF	560 pF	1.5 nF	5.6 nF	560 pF	1.5 nF	6.8 nF	680 pF	2.2 nF	8.2 nF	1.5 nF	3.9 nF	15 nF	2.2 nF	5.6 nF	22 nF	040
	470 pF	1.2 nF	2.2 nF	1.0 nF	2.7 nF	5.6 nF	1.2 nF	1.5 nF	6.8 nF	1.5 nF	2.2 nF	8.2 nF	2.7 nF	8.2 nF	15 nF	3.9 nF	12 nF	22 nF	060
				1.5 nF	4.7 nF	12 nF	1.8 nF	3.3 nF	12 nF	2.2 nF	3.9 nF	18 nF	3.9 nF	12 nF	33 nF	6.8 nF	18 nF	47 nF	100
			2.7 nF	5.6 nF	18 nF				3.9 nF	5.6 nF	27 nF	6.8 nF	15 nF	47 nF	10 nF	22 nF	68 nF	140	
												8.2 nF	22 nF	68 nF	12 nF	33 nF	100 nF	180	
8KV	47 pF	100 pF		120 pF	270 pF		120 pF	390 pF	820 pF	180 pF	470 pF	1.0 nF	330 pF	1.0 nF	2.2 nF	470 pF	1.2 nF	3.3 nF	020
	82 pF	220 pF		220 pF	560 pF		220 pF	680 pF	2.2 nF	270 pF	820 pF	2.7 nF	560 pF	1.5 nF	5.6 nF	820 pF	2.2 nF	8.2 nF	040
	180 pF	220 pF		390 pF	560 pF		470 pF	680 pF	2.2 nF	560 pF	820 pF	2.7 nF	1.2 nF	1.5 nF	5.6 nF	1.8 nF	2.2 nF	8.2 nF	060
				680 pF	1.8 nF		680 pF	1.2 nF	3.9 nF	820 pF	1.5 nF	5.6 nF	2.2 nF	1.8 nF	4.7 nF	12 nF	2.7 nF	6.8 nF	15 nF
			820 pF	2.2 nF					1.2 nF	2.2 nF	8.2 nF	2.2 nF	2.2 nF	5.6 nF	18 nF	3.3 nF	8.2 nF	22 nF	140
												3.3 nF	8.2 nF	22 nF	47 nF	12 nF	33 nF	180	
10KV	12 pF	39 pF		33 pF	100 pF		82 pF	220 pF	470 pF	100 pF	220 pF	560 pF	180 pF	180 pF	1.2 nF	270 pF	820 pF	1.8 nF	020
	33 pF	100 pF		82 pF	270 pF		150 pF	330 pF	1.2 nF	220 pF	390 pF	1.5 nF	390 pF	820 pF	2.7 nF	560 pF	1.2 nF	3.9 nF	040
	33 pF	100 pF		82 pF	270 pF		150 pF	330 pF	1.2 nF	220 pF	390 pF	1.5 nF	390 pF	820 pF	2.7 nF	560 pF	1.2 nF	3.9 nF	060
				180 pF	560 pF		180 pF	560 pF	2.2 nF	560 pF	1.2 nF	2.7 nF	1.2 nF	2.7 nF	5.6 nF	1.8 nF	3.9 nF	8.2 nF	100
			270 pF	820 pF		470 pF	1.0 nF	2.2 nF	560 pF	1.2 nF	4.7 nF	1.8 nF	1.5 nF	3.3 nF	8.2 nF	2.2 nF	4.7 nF	12 nF	140
												1.8 nF	3.9 nF	12 nF	2.7 nF	5.6 nF	18 nF	180	

QUICK REFERENCE DATA (Max capacitance)

	4040			40100			5550			6660			8060			80150			Height H (1/10 mm)
	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	NPO	N2T	X7R	
	330 pF	820 pF	1.8 nF	820 pF	2.2 nF	4.7 nF	560 pF	1.5 nF	3.3 nF	820 pF	2.2 nF	4.7 nF	1.0 nF	2.7 nF	5.6 nF	2.2 nF	6.8 nF	15 nF	
1KV	56 nF	180 nF	470 nF	150 nF	470 nF	1.2 µF	100 nF	330 nF	820 nF	150 nF	470 nF	1.2 µF	180 nF	560 nF	1.5 µF	470 nF	1.2 µF	3.3 µF	020
	100 nF	390 nF	1.0 µF	270 nF	820 nF	2.2 µF	180 nF	560 nF	1.8 µF	270 nF	820 nF	2.2 µF	330 nF	1.0 µF	2.7 µF	820 nF	2.7 µF	6.8 µF	040
	100 nF	390 nF	1.0 µF	270 nF	820 nF	2.2 µF	180 nF	560 nF	1.8 µF	270 nF	820 nF	2.2 µF	330 nF	1.0 µF	2.7 µF	820 nF	2.7 µF	6.8 µF	060
	330 nF	1.0 µF	1.8 µF	820 nF	2.7 µF	4.7 µF	560 nF	1.8 µF	3.3 µF	820 nF	2.7 µF	4.7 µF	1.0 µF	3.3 µF	5.6 µF	2.2 µF	8.2 µF	15 µF	100
	470 nF	1.5 µF	2.7 µF	1.0 µF	3.3 µF	6.8 µF	680 nF	2.2 µF	4.7 µF	1.0 µF	3.3 µF	6.8 µF	1.2 µF	3.9 µF	8.2 µF	3.3 µF	10 µF	22 µF	140
	560 nF	1.8 µF	3.9 µF	1.2 µF	4.7 µF	10 µF	1.0 µF	3.3 µF	6.8 µF	1.2 µF	4.7 µF	10 µF	1.5 µF	5.6 µF	12 µF	3.9 µF	12 µF	27 µF	180
2KV	12 nF	39 nF	100 nF	33 nF	82 nF	220 nF	22 nF	56 nF	150 nF	33 nF	82 nF	220 nF	39 nF	100 nF	270 nF	100 nF	270 nF	680 nF	020
	18 nF	68 nF	220 nF	47 nF	150 nF	470 nF	33 nF	100 nF	330 nF	47 nF	150 nF	470 nF	56 nF	180 nF	560 nF	150 nF	470 nF	1.5 µF	040
	39 nF	120 nF	220 nF	100 nF	330 nF	470 nF	68 nF	220 nF	330 nF	100 nF	330 nF	470 nF	120 nF	390 nF	560 nF	270 nF	1.0 µF	1.5 µF	060
	56 nF	180 nF	390 nF	150 nF	470 nF	1.0 µF	100 nF	330 nF	680 nF	150 nF	470 nF	1.0 µF	180 nF	560 nF	1.2 µF	470 nF	1.5 µF	3.3 µF	100
	100 nF	270 nF	560 nF	220 nF	680 nF	1.5 µF	180 nF	390 nF	1.0 µF	220 nF	560 nF	1.5 µF	270 nF	680 nF	1.8 µF	680 nF	1.8 µF	4.7 µF	140
	120 nF	390 nF	820 nF	270 nF	1.0 µF	2.2 µF	180 nF	680 nF	1.5 µF	270 nF	1.0 µF	1.8 µF	330 nF	1.2 µF	2.2 µF	820 nF	2.7 µF	5.6 µF	180
3KV	5.6 nF	15 nF	39 nF	12 nF	33 nF	100 nF	8.2 nF	22 nF	68 nF	12 nF	33 nF	100 nF	15 nF	39 nF	120 nF	39 nF	100 nF	270 nF	020
	10 nF	27 nF	82 nF	27 nF	68 nF	220 nF	18 nF	47 nF	150 nF	27 nF	68 nF	180 nF	33 nF	82 nF	220 nF	82 nF	180 nF	560 nF	040
	10 nF	27 nF	82 nF	27 nF	68 nF	220 nF	18 nF	47 nF	150 nF	27 nF	68 nF	180 nF	33 nF	82 nF	220 nF	82 nF	180 nF	560 nF	060
	33 nF	56 nF	150 nF	82 nF	120 nF	390 nF	56 nF	82 nF	270 nF	82 nF	120 nF	390 nF	100 nF	150 nF	470 nF	220 nF	390 nF	1.2 µF	100
	39 nF	82 nF	220 nF	100 nF	180 nF	560 nF	68 nF	120 nF	390 nF	100 nF	180 nF	560 nF	120 nF	220 nF	680 nF	330 nF	560 nF	1.8 µF	140
	56 nF	100 nF	330 nF	120 nF	270 nF	820 nF	82 nF	180 nF	560 nF	120 nF	270 nF	820 nF	150 nF	330 nF	1.0 µF	390 nF	820 nF	2.2 µF	180
5KV	1.5 nF	4.7 nF	12 nF	3.9 nF	10 nF	33 nF	2.7 nF	6.8 nF	22 nF	3.9 nF	10 nF	33 nF	4.7 nF	12 nF	39 nF	12 nF	33 nF	100 nF	020
	2.2 nF	6.8 nF	27 nF	5.6 nF	15 nF	68 nF	3.9 nF	10 nF	47 nF	5.6 nF	15 nF	68 nF	6.8 nF	18 nF	82 nF	18 nF	47 nF	180 nF	040
	4.7 nF	12 nF	27 nF	12 nF	33 nF	68 nF	8.2 nF	22 nF	47 nF	12 nF	33 nF	68 nF	15 nF	39 nF	82 nF	33 nF	100 nF	180 nF	060
	6.8 nF	18 nF	56 nF	18 nF	47 nF	120 nF	12 nF	33 nF	82 nF	18 nF	47 nF	120 nF	22 nF	56 nF	150 nF	56 nF	150 nF	390 nF	100
	12 nF	27 nF	82 nF	27 nF	68 nF	180 nF	18 nF	47 nF	120 nF	27 nF	68 nF	180 nF	33 nF	82 nF	220 nF	82 nF	180 nF	560 nF	140
	15 nF	39 nF	100 nF	33 nF	100 nF	270 nF	22 nF	68 nF	180 nF	33 nF	100 nF	270 nF	39 nF	120 nF	330 nF	100 nF	270 nF	820 nF	180
8KV	560 pF	1.5 nF	3.9 nF	1.2 nF	3.9 nF	8.2 nF	820 pF	2.7 nF	5.6 nF	1.2 nF	3.9 nF	8.2 nF	1.5 nF	4.7 nF	10 nF	3.9 nF	12 nF	27 nF	020
	1.0 nF	2.7 nF	8.2 nF	2.2 nF	5.6 nF	22 nF	1.5 nF	3.9 nF	15 nF	2.2 nF	5.6 nF	22 nF	2.7 nF	6.8 nF	27 nF	6.8 nF	18 nF	68 nF	040
	1.8 nF	2.7 nF	8.2 nF	4.7 nF	5.6 nF	22 nF	3.3 nF	3.9 nF	15 nF	4.7 nF	5.6 nF	22 nF	5.6 nF	6.8 nF	27 nF	15 nF	18 nF	68 nF	060
	2.7 nF	6.8 nF	18 nF	6.8 nF	18 nF	47 nF	4.7 nF	12 nF	33 nF	6.8 nF	18 nF	47 nF	8.2 nF	22 nF	56 nF	22 nF	56 nF	120 nF	100
	3.9 nF	10 nF	27 nF	10 nF	27 nF	68 nF	6.8 nF	18 nF	47 nF	10 nF	22 nF	68 nF	12 nF	27 nF	82 nF	27 nF	68 nF	180 nF	140
	5.6 nF	12 nF	39 nF	15 nF	33 nF	82 nF	10 nF	22 nF	56 nF	15 nF	33 nF	82 nF	18 nF	39 nF	100 nF	39 nF	100 nF	270 nF	180
10KV	330 pF	820 pF	1.8 nF	820 pF	2.2 nF	4.7 nF	560 pF	1.5 nF	3.3 nF	820 pF	2.2 nF	4.7 nF	1.0 nF	2.7 nF	5.6 nF	2.2 nF	6.8 nF	15 nF	020
	680 pF	1.2 nF	4.7 nF	1.5 nF	3.3 nF	12 nF	1.2 nF	2.2 nF	8.2 nF	1.5 nF	3.3 nF	12 nF	1.8 nF	3.9 nF	15 nF	4.7 nF	10 nF	33 nF	040
	680 pF	1.2 nF	4.7 nF	1.5 nF	3.3 nF	12 nF	1.2 nF	2.2 nF	8.2 nF	1.5 nF	3.3 nF	12 nF	1.8 nF	3.9 nF	15 nF	4.7 nF	10 nF	33 nF	060
	1.8 nF	3.9 nF	10 nF	4.7 nF	10 nF	22 nF	3.3 nF	6.8 nF	15 nF	4.7 nF	10 nF	22 nF	5.6 nF	12 nF	27 nF	15 nF	33 nF	68 nF	100
	2.7 nF	5.6 nF	15 nF	6.8 nF	12 nF	33 nF	4.7 nF	10 nF	22 nF	6.8 nF	12 nF	33 nF	8.2 nF	15 nF	39 nF	18 nF	39 nF	100 nF	140
	3.3 nF	6.8 nF	18 nF	8.2 nF	18 nF	47 nF	5.6 nF	12 nF	33 nF	8.2 nF	18 nF	47 nF	10 nF	22 nF	56 nF	22 nF	47 nF	150 nF	180

STORAGE

To prevent the damage of solderability of terminations, the following storage conditions are recommended :

Indoors under 5 ~ 40°C and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as possible. Taped products should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 24 months after shipment. Extended shelf life over this period requires a solderability check before use.

HANDLING

Chip capacitors are made of dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chips Capacitors should be handled with care to avoid contamination or damage. The use of vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.

PREHEAT

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat process is required.

The rate of preheat should not exceed 3°C per second.

SOLDERING FLUX

Use mildly activated rosin RA and RMA fluxes, but do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

SOLDERING TYPE

Leads containing solders, such as Sn60, Sn62 or Sn63 and lead free solders, such as SnAgCu, can all be used with our MLCCs.

In case of non-magnetic termination code "C", use leads containing or lead (Pb)-free SAC305 solders.

SOLDERING HEIGHT

The solder climbing minimum height is suggesting to 25% of chip thickness or 500um whichever is less.

(Reference from IPC-610E)

COOLING

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint.


CLEANING

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvents. The choice of the proper system depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability for the cleaning system to remove flux residues and contamination from under the chips is of paramount importance.


SOLDERING CONDITIONS

SIZE	THICKNESS	WAVE	REFLOW
0402	All	0	0
0505	All	0	0
0603	All	0	0
0805	< 1.25mm	0	0
0805	≥ 1.25mm		0
1111	< 1.25mm	0	0
1111	≥ 1.25mm		0
1206	< 1.25mm	0	0
1206	≥ 1.25mm		0
1210	< 1.25mm	0	0
1210	≥ 1.25mm		0
larger than 1210	All		0


WAVE SOLDERING PROFILE

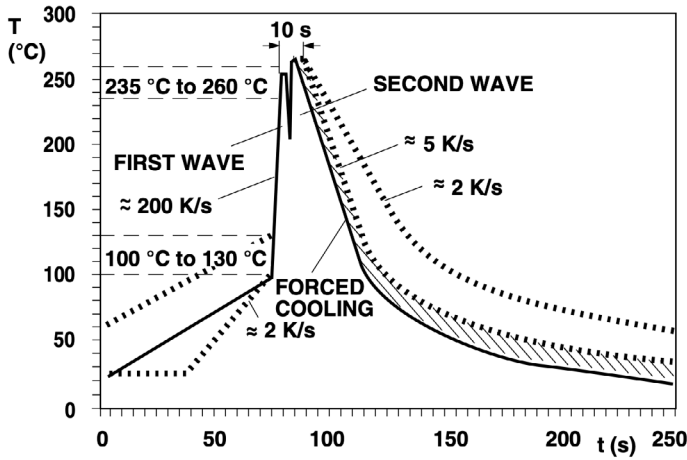


LEADFREE REFLOW SOLDERING PROFILE

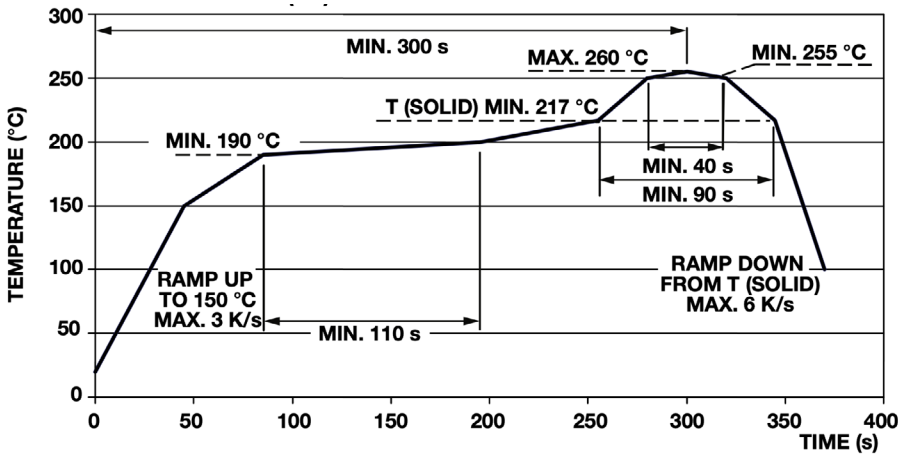

SNPB REFLOW SOLDERING PROFILE

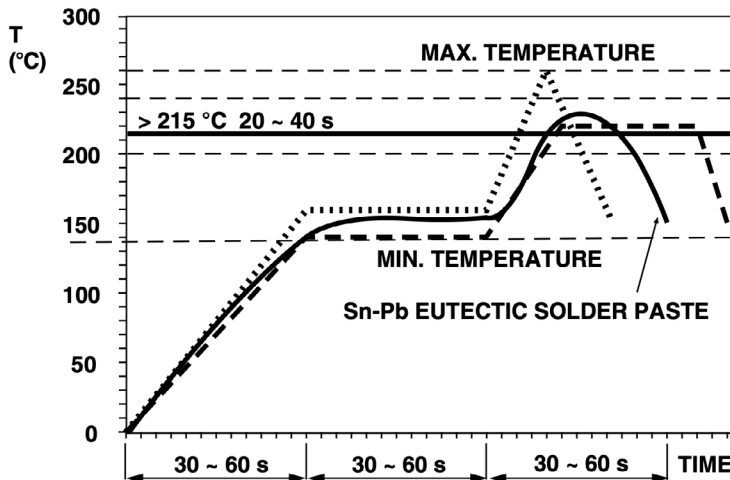

VAPOUR PHASE REFLOW PROFILE

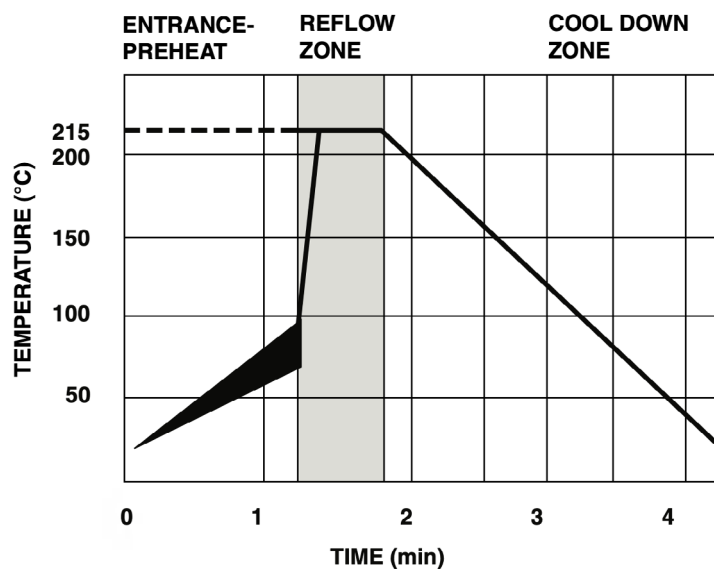


HAND SOLDERING

Hand soldering is not recommended as the thermal shock may cause a crack, however if used the following recommendations should be taken :

- Soldering iron tip diameter ≤ 3.0 mm and wattage max. 20W.
- The Capacitors shall be pre-heated to 150°C and the temperature gradient between the devices and the tip of the soldering iron.
- Tip temperature should be $\leq 280^\circ\text{C}$ and should't be applied for more than 5 seconds.
- The required amount of solder shall be melted on the soldering tip.
- The tip of iron should not contact the ceramic body directly.
- The Capacitors shall be cooled gradually at room temperature after soldering.
- Forced air cooling is not allowed.


TYPICAL SMD FOOTPRINT WAVE SOLDERING

SIZE	FOOTPRINT DIMENSIONS IN MM					
	A	B	C	D	E	F
0603	2.40	0.80	0.70	1.00	3.10	1.40
0805	3.20	1.30	0.90	1.40	4.10	1.85
1206	4.80	1.70	1.25	2.30	5.90	2.25
1210	4.80	2.60	1.25	2.30	5.90	3.15

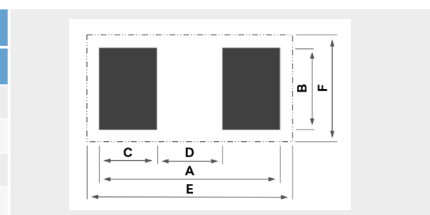


TYPICAL SMD FOOTPRINT REFLOW SOLDERING

SIZE	FOOTPRINT DIMENSIONS IN mm					
	A	B	C	D	E	F
0201	0.65	0.30	0.21	0.23	0.90	0.60
0204	1.00	1.00	0.30	0.40	1.25	1.45
0402	1.50	0.50	0.40	0.70	1.75	0.95
0306	1.30	1.60	0.40	0.50	1.55	2.05
0404	1.50	1.00	0.40	0.70	1.75	1.45
0504	1.90	1.00	0.40	1.10	2.15	1.45
0505	1.90	1.30	0.50	0.80	2.15	1.75
0508	1.90	2.00	0.50	0.90	2.15	2.55
0603	2.30	0.80	0.60	1.10	2.55	1.35
0612	2.30	3.20	0.60	1.10	2.55	3.75
0805	2.90	1.25	0.90	1.10	3.15	1.80
1206	4.10	1.60	0.90	2.30	4.35	2.25
1210	4.10	2.50	1.00	2.10	4.35	3.15
1808	5.50	2.10	1.20	3.10	5.75	2.75
1812	5.50	3.30	1.20	3.10	5.75	3.95
1825	5.50	6.55	1.20	3.10	5.75	7.20
2211	6.80	3.00	1.40	4.00	7.05	3.65
2220	6.80	5.40	1.40	4.00	7.05	6.05
2225	6.80	6.70	1.65	3.50	7.05	7.50
2525	7.70	6.75	1.65	4.40	7.95	7.55
2825	8.40	6.70	1.65	5.10	8.65	7.50
3033	9.00	8.80	1.95	5.10	9.25	9.60
3640	10.55	10.70	2.35	5.85	10.80	11.50
4040	11.60	10.70	2.35	6.90	11.85	11.50
40100	11.60	26.20	2.35	6.90	11.85	27.00
5550	15.50	13.20	2.35	10.80	15.75	14.00
6080	16.70	20.80	2.35	12.00	16.95	21.60
6660	18.30	15.70	2.35	13.60	18.55	16.50
8060	21.90	15.70	2.35	17.20	22.15	16.50
80150	21.90	38.90	2.35	17.20	22.15	39.70

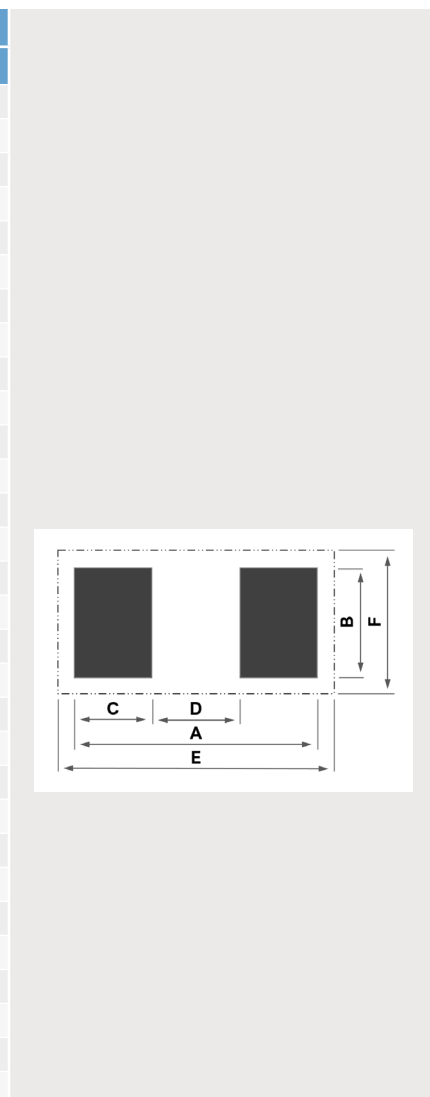

TYPICAL FILTER FOOTPRINT REFLOW SOLDERING


SIZE	FOOTPRINT DIMENSIONS IN mm						
	A	B	C	D	G	H	I
0603	2.30	0.80	0.45	1.40	0.60	0.40	1.50
0805	2.90	1.25	0.90	1.80	0.80	0.50	2.00
1206	4.10	1.60	0.90	2.40	1.00	0.70	3.00
1806	5.50	1.60	1.20	3.20	1.00	1.10	3.00
1812	5.50	3.30	1.20	3.90	1.50	1.20	4.80
2220	6.80	5.40	1.40	4.50	1.50	1.50	7.00

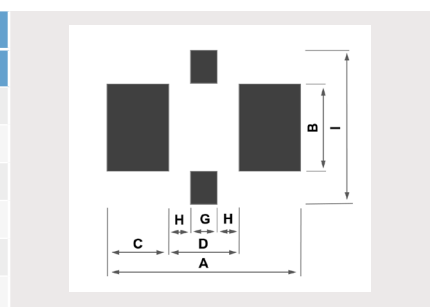


This document is subject to change without notice.

PACKAGE DIMENSION AND QUANTITY

SIZE	THICKNESS	PAPER TAPE		PLASTIC TAPE	
		7" REEL	13" REEL	7" REEL	13" REEL
0402	0.5 ± 0.05	10 K	50 K		
0504	0.6 ± 0.05			4K	15K
	0.9 ± 0.05			4K	15K
0603	0.7 ± 0.07	4K		4K	15K
	0.9 ± 0.07	4K	15K	4K	15K
	0.9 ± 0.07			4K	15K
	1.1 ± 0.07			4K	15K
0805	0.8 ± 0.07	4K	15K	4K	15K
	0.9 ± 0.07			4K	10K
	1.1 ± 0.07			3K	10K
	1.3 ± 0.07			3K	10K
1206	1.1 ± 0.1			3K	10K
	1.4 ± 0.1			3K	8K
	1.8 ± 0.1			2K	8K
1210	1.4 ± 0.1			3K	8K
	1.8 ± 0.1			1K	6K
1808	1.4 ± 0.1			3K	8K
1812	1.6 ± 0.1			2K	8K
	2.1 ± 0.1			1K	6K
	2.8 ± 0.1			1K	6K
2220	1.8 ± 0.1			1K	6K
	3.0 ± 0.1			0.5K	2K
2225	3.0 ± 0.1			0.5K	2K
3033	3.0 ± 0.1			0.5K	2K
3640	3.0 ± 0.1			0.5K	2K
5440	3.9 ± 0.1				0.5K - 1K

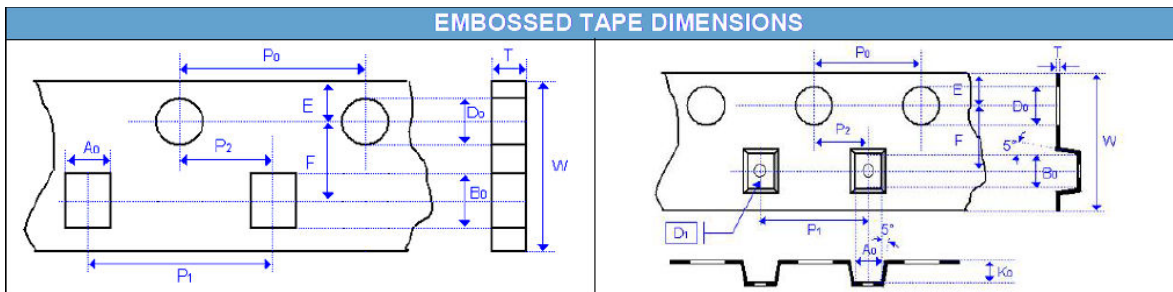

REEL SIZE	7"	7"	13"
C	13.0 +0.5/-0.2	13.0 +0.5/-0.2	13.0 +0.7/-0.3
W1	8.4 +1.5/-0	12.4 +2.0/-0	8.4 +2.0/-0
A	178.0 ±0.10	178.0 ±0.10	330.0 ±1.0
N	60.0 ±1.0	80.0 ±1.0	100 ±1.0

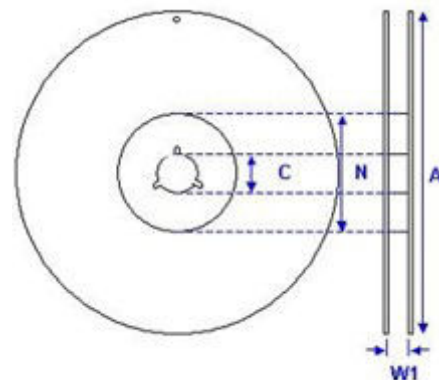

RELIABILITY PRINCIPLES OVERVIEW

In order to guarantee highly reliable products to their customers, we follow a strict quality policy which is explained below :

- According to AECQ philosophy, each component belongs to a family, in which the most restrictive members (four corners) have been fully qualified.
- PME components are produced in our Vendôme facility, with very stable process and equipments, in order to ensure reliability and reproductibility.
- Reliability is based on batch tests, new product or equipment-specific qualifications and periodic requalifications.
- In addition to those regular tests, our quality departement launches regular accelerated tests to further deepen our reliability datas.
- Tests and qualifications of our standard products are based on AECQ methodology and are qualified according to the following limits.
- In accordance to AECQ methodology, specifics tests and limits can be adapted to fit our clients' needs.
- A whole range of stricter reliability tests can be offered for high Reliability products (burn-in, shocks, pulses...) for medical, space and defense applications.
- Based on our reliability database, FIT datas can be provided if necessary.

TESTING

Tests conducted during each batch

FREQUENCY	TEST/STRESS	REFERENCE	AEC-Q	DETAIL
100%	Capa, DF, IR	CECC-32100-4.6		according to datasheet
100%	Visual	CECC-32100-4.5	AEC-Q200-9	no visual defects
50/batch	DPA		AEC-Q200-5	internal component integrity
5/batch	Dimension	CECC-32100-4.5	AEC-Q200-5	according to datasheet
5/batch	Resistance to soldering heat	CECC-32100-4.10	AEC-Q200-15	
5/batch	Solderability	CECC-32100-4.11	AEC-Q200-18	
10/batch	Voltage proof	CECC-32100-4.6.4		
1/ceramic batch	Temperature coefficient	CECC 32100-Prgph4,7		according to datasheet

QUALIFICATIONS

Each component family has been qualified according to CECC and AECQ tests methodology, which are renewed on a periodic basis.

FREQUENCY	TEST/STRESS	REFERENCE	AEC-Q	DETAIL
Qualif	Electrical Characterization	CECC-32100-4.6 4.7	AEC-Q200-19	measure before test according to datasheet and after test according to post environmental limits
Qualif	Temperature Cycling	JESD22 Method-JA method 104	AEC-Q200-4	1,000 cycles -55°C to +125°C Measurement at 24 ± 2 hours after test conclusion
Qualif	Biased Humidity	MIL-STD-202 Method 103	AEC-Q200-7	1,000 hours 85°C/85%RH. Rated voltage. Measurement at 24 ± 2 hours after test conclusion
Qualif	Operational Life	MIL-STD-202 Method 108 condition D	AEC-Q200-8	1,000 hours at 125°C with applied Voltage : 2xRV RV≤500V, 1.2xRV 500V<RV≤1250V, RV RV>1250V
Qualif	High Temperature Exposure (Storage)	MIL-STD-202 Method 108	AEC-Q200-3	1,000 hours at 150°C with 0V. Measurement at 24 ± 2 hours after test conclusion
Qualif	Terminal Strength	CECC-32100-4.8	AEC-Q200-6	1.8kg 60 seconds
Qualif	Vibration	MIL-STD-202 Method 204	AEC-Q200-14	5g 20min 12cycles 3 orientations 10-2000Hz
Qualif	Board Flex	CEC 32100-4.9	AEC-Q200-21	3mm Type 1, 2mm Type 2, Measurement at 24 ± 2 hours after test conclusion

POST ENVIRONMENTAL STRESS LIMIT

DIELECTRIC	DISSIPATION FACTOR (MAXIMUM)	CAPACITANCE SHIFT	INSULATION RESISTANCE
NPO	≤ 4 10 ⁻³	±2%	10% initial limit
N2T	≤ 6 10 ⁻³	±4%	10% initial limit
X7R	≤ 0.035	±15%	10% initial limit

REACH Compliance

- We deliver non-chemical articles only.
- These contain no substances which are intended to be released under normal or reasonably foreseeable conditions of use according to Reach article 7(1).

We confirm hereby that our products contain none of the substances which are listed in the present candidate list of the European Chemicals Agency (ECHA), above a concentration of 0.1% by weight of the whole component.

Candidate list of substances (European Chemicals Agency ECHA) :
<http://echa.europa.eu/fr/candidate-list-table>

ROHS COMPLIANCE

We herewith confirm that RoHS-compliant products are conforming to the following EU directives:
EU directive 2015/863/EU EU directive 2011/65/EU EU directive 2003/11/EC

Following restricted materials are not used and do not exceed the legal limits: Lead (Pb, see exemptions),

- Mercury (Hg)
- Cadmium (Cd)
- Chromium (Cr VI)
- Polybrominated biphenyls (PBB) Polybrominated diphenyl ethers (PBDE) Bis(2-Ethylhexyl) phthalate (DEHP) Benzyl butyl phthalate (BBP)
- Dibutyl phthalate (DBP) Diisobutyl phthalate (DIBP)

Exemptions: The following exemptions according to the RoHS appendix are applicable:

Identity 7(a) :

- Lead in high melting temperature type solders (i.e lead-based alloys containing 85% by weight or more lead).

Identity 7(c)-I :

- Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

The components are suitable for a lead-free process according to EN 60068-2-58 and in accordance with the IPC/JEDEC standard J-Std-020D. The lead free process has been tested using solder alloy **Sn 96.5 Ag 3 Cu 0.5**

Export controls and dual-use regulations

Some components fall under 'dual-use' items under international export controls definition - those that can be used for civil or military purposes which meet certain specified technical standards.

The defining criteria for a dual use component is one with a voltage rating of >750Vdc and a capacitance value of >250nF when measured at 750Vdc and a series inductance <10nH. Components defined as dual-use under the above criteria may require a licence for export across international borders. Please contact us for further information on specific part numbers.

ISO9001:2015

In their design, research and development as well as the manufacturing of MLCC capacitors, customer service and distribution we use and maintain a Management System audited and certified in accordance to : **ISO9001:2015**

You may contact us for any inquiry regarding the regulations and compliance listed above.