




HRS10 SERIES

9.6 to 48kV, 10A, Standard Recovery
Power Rectifier Assemblies

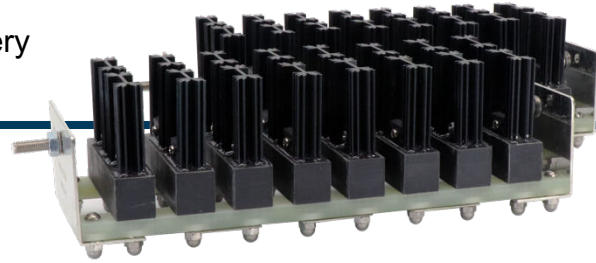

Features

- Capacitor Compensated
- Fast Recovery Models Available
- Molded Plastic Body, ANSI/UL94 V-0 Rated
- Replacement for Phillips Amperex RS3.5, RS5, RS10, OSB-, OSM-, OSS, 9115, 9215, 9415

Specifications¹


Part Number ²	V_{RRM} V	I_{FAVM1} A	I_{FAVM2} A	V_F V	I_R μ A	I_{FSM} A	L in.	H in.
HRS10-6	9600	10	25	6	100	950	4.80	3.75
HRS10-9	16000	10	25	10	100	950	7.00	3.75
HRS10-12	19200	10	25	12	100	950	8.15	3.75
HRS10-15	25600	10	25	16	100	950	10.40	3.75
HRS10-18	28800	10	25	18	100	950	11.50	3.75
HRS10-21	32000	10	25	20	100	950	12.62	3.75
HRS10-24	38400	10	25	24	100	950	14.85	3.75
HRS10-27	41600	10	25	26	100	950	16.00	3.75
HRS10-30	48000	10	25	30	100	950	18.20	3.75

Temperature °C	
Operating Temperature	-55 to 150
Storage Temperature	-55 to 150
Maximum Junction Temperature	150

¹25°C ambient temperature unless stated otherwise.

²Add an "S" after the part number for M6-35 studs instead of the standard 1/4-28-1" studs.

Drawings

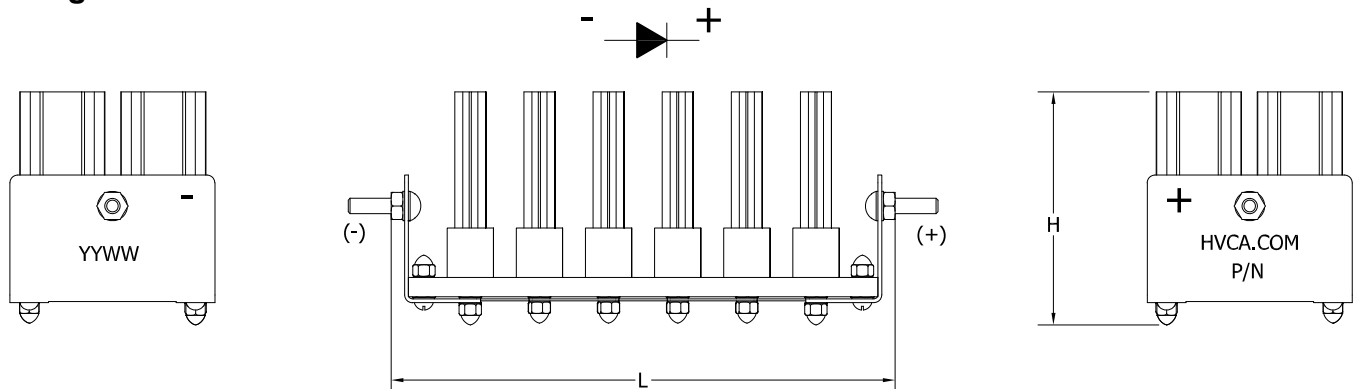

Dimensions in inches, tolerances ± 0.020 except as noted



Specification Definitions

Specifications		Conditions
V_{RRM}	Maximum Repetitive Reverse Voltage	-
I_{FAVM1}	Maximum Average Forward Current	At T _A = 50°C or Below, Natural Convection Cooling
I_{FAVM2}	Maximum Average Forward Current	At T _A = 50°C or Below, Forced Air Cooling at 300 LFM
V_F	Maximum Forward Voltage Drop	At I _F = 5.0A
I_R	Maximum Leakage Current	At V _{RRM}
I_{FSM}	Maximum Surge Current	At 10mS, Single Half Sine

Note: Specifications subject to change without notice. Photo is representation only.

